

# **COMP2310/COMP6310**

## **Systems, Networks, & Concurrency**

Convener: Prof John Taylor

# **Course Update**

- **Public Holiday Monday 7 October**
- **Make-up Lecture**
  - When: Tuesday 8 October, 14:00-16:00
  - Where: Copland Lecture Theatre
- **Quiz 1 – released on Tuesday**
  - On Wattle
  - Covers all of week 1 and 2
  - To help you assess your performance

# Machine-Level Programming II: Control

Acknowledgement of material: With changes suited to ANU needs, the slides are obtained from Carnegie Mellon University: <https://www.cs.cmu.edu/~213/>

# Today

- Control: Condition codes
- Conditional branches
- Loops
- Switch Statements

# Processor State (x86-64, Partial)

## ■ Information about currently executing program

- Temporary data ( `%rax`, ... )
- Location of runtime stack ( `%rsp` )
- Location of current code control point ( `%rip`, ... )
- Status of recent tests ( CF, ZF, SF, OF )

Current stack top

Registers

<code>%rax</code>	<code>%r8</code>
<code>%rbx</code>	<code>%r9</code>
<code>%rcx</code>	<code>%r10</code>
<code>%rdx</code>	<code>%r11</code>
<code>%rsi</code>	<code>%r12</code>
<code>%rdi</code>	<code>%r13</code>
<code>%rsp</code>	<code>%r14</code>
<code>%rbp</code>	<code>%r15</code>

`%rip`

Instruction pointer

CF

ZF

SF

OF

Condition codes

# Condition Codes (Implicit Setting)

## ■ Single bit registers

CF Carry Flag (for unsigned) SF Sign Flag (for signed)

ZF Zero Flag OF Overflow Flag (for signed)

## ■ Implicitly set (think of it as side effect) by arithmetic operations

Example: `addq Src,Dest`  $\leftrightarrow t = a+b$

CF set if carry out from most significant bit (unsigned overflow)

ZF set if  $t == 0$

SF set if  $t < 0$  (as signed)

OF set if two's-complement (signed) overflow

$(a>0 \ \&\& \ b>0 \ \&\& \ t<0) \ \|\ (a<0 \ \&\& \ b<0 \ \&\& \ t>=0)$

## ■ Not set by `leaq` instruction

# Condition Codes (Explicit Setting: Compare)

## ■ Explicit Setting by Compare Instruction

- `cmpq Src2, Src1`
- `cmpq b, a` like computing  $a - b$  without setting destination
- CF set if carry out from most significant bit (used for unsigned comparisons)
- ZF set if  $a == b$
- SF set if  $(a - b) < 0$  (as signed)
- OF set if two's-complement (signed) overflow  
$$(a>0 \&& b<0 \&& (a-b)<0) \mid\mid (a<0 \&& b>0 \&& (a-b)>0)$$

# Condition Codes (Explicit Setting: Test)

## ■ Explicit Setting by Test instruction

- `testq Src2, Src1`
  - `testq b, a` like computing `a&b` without setting destination
- Sets condition codes based on value of Src1 & Src2
- Useful to have one of the operands be a mask
- ZF set when `a&b == 0`
- SF set when `a&b < 0`

# Reading Condition Codes

## ■ SetX Instructions

- Set low-order byte of destination to 0 or 1 based on combinations of condition codes
- Does not alter remaining 7 bytes

SetX	Condition	Description
<b>sete</b>	<b>ZF</b>	Equal / Zero
<b>setne</b>	<b>~ZF</b>	Not Equal / Not Zero
<b>sets</b>	<b>SF</b>	Negative
<b>setns</b>	<b>~SF</b>	Nonnegative
<b>setg</b>	<b>~(SF^OF) &amp; ~ZF</b>	Greater (Signed)
<b>setge</b>	<b>~(SF^OF)</b>	Greater or Equal (Signed)
<b>setl</b>	<b>(SF^OF)</b>	Less (Signed)
<b>setle</b>	<b>(SF^OF)   ZF</b>	Less or Equal (Signed)
<b>seta</b>	<b>~CF &amp; ~ZF</b>	Above (unsigned)
<b>setb</b>	<b>CF</b>	Below (unsigned)

# x86-64 Integer Registers

%rax	%al	%r8	%r8b
%rbx	%bl	%r9	%r9b
%rcx	%cl	%r10	%r10b
%rdx	%dl	%r11	%r11b
%rsi	%sil	%r12	%r12b
%rdi	%dil	%r13	%r13b
%rsp	%spl	%r14	%r14b
%rbp	%bp1	%r15	%r15b

- Can reference low-order byte
- `setz %al ; Set AL to 1 if e.g. %EAX == %EBX, otherwise set AL to 0`

# Reading Condition Codes (Cont.)

## ■ SetX Instructions:

- Set single byte based on combination of condition codes

## ■ One of addressable byte registers

- Does not alter remaining bytes
- Typically use `movzbl` to finish job
  - 32-bit instructions also set upper 32 bits to 0

```
int gt (long x, long y)
{
    return x > y;
}
```

Register	Use(s)
<code>%rdi</code>	Argument <code>x</code>
<code>%rsi</code>	Argument <code>y</code>
<code>%rax</code>	Return value

```
cmpq    %rsi, %rdi    # Compare x:y
setg    %al             # Set when >
movzbl  %al, %eax      # Zero rest of %rax
ret
```

# Today

- Control: Condition codes
- Conditional branches
- Loops
- Switch Statements

# Jumping

## ■ jX Instructions

- Jump to different part of code depending on condition codes

jX	Condition	Description
<code>jmp</code>	<code>1</code>	Unconditional
<code>je</code>	<code>ZF</code>	Equal / Zero
<code>jne</code>	<code>~ZF</code>	Not Equal / Not Zero
<code>js</code>	<code>SF</code>	Negative
<code>jns</code>	<code>~SF</code>	Nonnegative
<code>jg</code>	<code>~(SF^OF) &amp; ~ZF</code>	Greater (Signed)
<code>jge</code>	<code>~(SF^OF)</code>	Greater or Equal (Signed)
<code>jl</code>	<code>(SF^OF)</code>	Less (Signed)
<code>jle</code>	<code>(SF^OF)   ZF</code>	Less or Equal (Signed)
<code>ja</code>	<code>~CF &amp; ~ZF</code>	Above (unsigned)
<code>jb</code>	<code>CF</code>	Below (unsigned)

# Conditional Branch Example (Old Style)

## ■ Generation

```
linux> gcc -Og -S -fno-if-conversion control.c
```

```
long absdiff
    (long x, long y)
{
    long result;
    if (x > y)
        result = x-y;
    else
        result = y-x;
    return result;
}
```

absdiff:

```
    cmpq    %rsi, %rdi  # x:y
    jle     .L4
    movq    %rdi, %rax
    subq    %rsi, %rax
    ret
.L4:      # x <= y
    movq    %rsi, %rax
    subq    %rdi, %rax
    ret
```

Register	Use(s)
%rdi	Argument <b>x</b>
%rsi	Argument <b>y</b>
%rax	Return value

# Expressing with Goto Code

- C allows **goto** statement
- Jump to position designated by label

```
long absdiff
    (long x, long y)
{
    long result;
    if (x > y)
        result = x-y;
    else
        result = y-x;
    return result;
}
```

```
long absdiff_j
    (long x, long y)
{
    long result;
    int ntest = x <= y;
    if (ntest) goto Else;
    result = x-y;
    goto Done;
Else:
    result = y-x;
Done:
    return result;
}
```

# General Conditional Expression Translation (Using Branches)

C Code

```
val = Test ? Then_Expr : Else_Expr;
```

```
val = x>y ? x-y : y-x;
```

Goto Version

```
ntest = !Test;  
if (ntest) goto Else;  
val = Then_Expr;  
goto Done;  
Else:  
    val = Else_Expr;  
Done:  
    . . .
```

- Create separate code regions for then & else expressions
- Execute appropriate one

# Using Conditional Moves

## ■ Conditional Move Instructions

- Instruction supports:  
if (Test) Dest  $\leftarrow$  Src
- Supported in post-1995 x86 processors
- GCC tries to use them
  - But, only when known to be safe

## ■ Why?

- Branches are very disruptive to instruction flow through pipelines
- Conditional moves do not require control transfer

### C Code

```
val = Test  
? Then_Expr  
: Else_Expr;
```

### Goto Version

```
result = Then_Expr;  
eval = Else_Expr;  
nt = !Test;  
if (nt) result = eval;  
return result;
```

# Conditional Move Example

```
long absdiff
    (long x, long y)
{
    long result;
    if (x > y)
        result = x-y;
    else
        result = y-x;
    return result;
}
```

Register	Use(s)
%rdi	Argument x
%rsi	Argument y
%rax	Return value

```
absdiff:
    movq    %rdi, %rax    # x
    subq    %rsi, %rax    # result = x-y
    movq    %rsi, %rdx
    subq    %rdi, %rdx    # eval = y-x
    cmpq    %rsi, %rdi    # x:y
    cmovle %rdx, %rax    # if <=, result = eval
    ret
```

# Bad Cases for Conditional Move

## Expensive Computations

```
val = Test(x) ? Hard1(x) : Hard2(x);
```

- Both values get computed
- Only makes sense when computations are very simple

## Risky Computations

```
val = p ? *p : 0;
```

- Both values get computed
- May have undesirable effects

## Computations with side effects

```
val = x > 0 ? x*=7 : x+=3;
```

- Both values get computed – x changes!
- Must be side-effect free

# Today

- Control: Condition codes
- Conditional branches
- Loops
- Switch Statements

# “Do-While” Loop Example

C Code

```
long pcount_do
(unsigned long x) {
    long result = 0;
    do {
        result += x & 0x1;
        x >>= 1;
    } while (x);
    return result;
}
```

Goto Version

```
long pcount_goto
(unsigned long x) {
    long result = 0;
loop:
    result += x & 0x1;
    x >>= 1;
    if(x) goto loop;
    return result;
}
```

- Count number of 1's in argument **x** (“popcount”)
- Use conditional branch to either continue looping or to exit loop

# “Do-While” Loop Compilation

Goto Version

```
long pcount_goto
(unsigned long x) {
    long result = 0;
loop:
    result += x & 0x1;
    x >>= 1;
    if(x) goto loop;
    return result;
}
```

Register	Use(s)
%rdi	Argument <b>x</b>
%rax	<b>result</b>

```
        movl    $0, %eax      # result = 0
.L2:                           # loop:
        movq    %rdi, %rdx
        andl    $1, %edx      # t = x & 0x1
        addq    %rdx, %rax    # result += t
        shrq    %rdi          # x >>= 1
        jne     .L2          # if (x) goto loop
        rep; ret
```

# General “Do-While” Translation

C Code

```
do  
  Body  
  while (Test);
```

Goto Version

```
loop:  
  Body  
  if (Test)  
    goto loop
```

■ **Body:** {  
    **Statement**<sub>1</sub>;  
    **Statement**<sub>2</sub>;  
    ...  
    **Statement**<sub>n</sub>;  
}

# General “While” Translation #1

- “Jump-to-middle” translation
- Used with -Og

While version

```
while (Test)
    Body
```



Goto Version

```
goto test;
loop:
    Body
test:
    if (Test)
        goto loop;
done:
```

# While Loop Example #1

C Code

```
long pcount_while
(unsigned long x) {
    long result = 0;
    while (x) {
        result += x & 0x1;
        x >>= 1;
    }
    return result;
}
```

Jump to Middle

```
long pcount_goto_jtm
(unsigned long x) {
    long result = 0;
    goto test;
loop:
    result += x & 0x1;
    x >>= 1;
test:
    if(x) goto loop;
    return result;
}
```

- Compare to do-while version of function
- Initial goto starts loop at test

# General “While” Translation #2

While version

```
while (Test)
    Body
```

- “Do-while” conversion
- Used with `-O1`

Do-While Version

```
if (!Test)
    goto done;
do
    Body
    while(Test);
done:
```

Goto Version

```
if (!Test)
    goto done;
loop:
    Body
    if (Test)
        goto loop;
done:
```

# While Loop Example #2

## C Code

```
long pcount_while
(unsigned long x) {
    long result = 0;
    while (x) {
        result += x & 0x1;
        x >>= 1;
    }
    return result;
}
```

## Do-While Version

```
long pcount_goto_dw
(unsigned long x) {
    long result = 0;
    if (!x) goto done;
loop:
    result += x & 0x1;
    x >>= 1;
    if(x) goto loop;
done:
    return result;
}
```

- Compare to do-while version of function
- Initial conditional guards entrance to loop

# “For” Loop Form

## General Form

```
for (Init; Test; Update)  
    Body
```

```
#define WSIZE 8*sizeof(int)  
long pcount_for  
(unsigned long x)  
{  
    size_t i;  
    long result = 0;  
    for (i = 0; i < WSIZE; i++)  
    {  
        unsigned bit =  
            (x >> i) & 0x1;  
        result += bit;  
    }  
    return result;  
}
```

Init

```
i = 0
```

Test

```
i < WSIZE
```

Update

```
i++
```

Body

```
{  
    unsigned bit =  
        (x >> i) & 0x1;  
    result += bit;  
}
```

# “For” Loop → While Loop

For Version

```
for (Init; Test; Update)  
    Body
```



While Version

```
Init;  
  
while (Test) {  
    Body  
    Update;  
}
```

# For-While Conversion

Init

```
i = 0
```

Test

```
i < WSIZE
```

Update

```
i++
```

Body

```
{  
    unsigned bit =  
        (x >> i) & 0x1;  
    result += bit;  
}
```

```
long pcount_for_while  
(unsigned long x)  
{  
    size_t i;  
    long result = 0;  
    i = 0;  
    while (i < WSIZE)  
    {  
        unsigned bit =  
            (x >> i) & 0x1;  
        result += bit;  
        i++;  
    }  
    return result;  
}
```

# “For” Loop Do-While Conversion

C Code

Goto Version

```
long pcount_for
(unsigned long x)
{
    size_t i;
    long result = 0;
    for (i = 0; i < WSIZE; i++)
    {
        unsigned bit =
            (x >> i) & 0x1;
        result += bit;
    }
    return result;
}
```

```
long pcount_for_goto_dw
(unsigned long x) {
    size_t i;
    long result = 0;
    i = 0;
    if (! (i < WSIZE)) { Init
        goto done; ! Test
    }
    loop:
    {
        unsigned bit =
            (x >> i) & 0x1; Body
        result += bit;
    } Update
    if (i < WSIZE) { Test
        goto loop;
    }
    done:
    return result;
}
```

- Initial test can be optimized away

# Today

- Control: Condition codes
- Conditional branches
- Loops
- **Switch Statements**

```
long switch_eg
    (long x, long y, long z)
{
    long w = 1;
    switch(x) {
        case 1:
            w = y*z;
            break;
        case 2:
            w = y/z;
            /* Fall Through */
        case 3:
            w += z;
            break;
        case 5:
        case 6:
            w -= z;
            break;
        default:
            w = 2;
    }
    return w;
}
```

# Switch Statement Example

- Multiple case labels
  - Here: 5 & 6
- Fall through cases
  - Here: 2
- Missing cases
  - Here: 4

# Jump Table Structure

Switch Form

```
switch(x) {  
    case val_0:  
        Block 0  
    case val_1:  
        Block 1  
    . . .  
    case val_{n-1}:  
        Block n-1  
}
```

Jump Table

jtab:



Jump Targets

Targ0:

Code Block  
0

Targ1:

Code Block  
1

Targ2:

Code Block  
2

•  
•  
•

Targ $n-1$ :

Code Block  
n-1

Translation (Extended C)

```
goto *JTab[x];
```

# Switch Statement Example

```
long switch_eg(long x, long y, long z)
{
    long w = 1;
    switch(x) {
        . . .
    }
    return w;
}
```

Setup:

```
switch_eg:
    movq    %rdx, %rcx
    cmpq    $6, %rdi    # x:6
    ja     .L8
    jmp    * .L4(,%rdi,8)
```

What range of values  
takes default?

Register	Use(s)
%rdi	Argument x
%rsi	Argument y
%rdx	Argument z
%rax	Return value

Note that w not  
initialized here

# Switch Statement Example

```
long switch_eg(long x, long y, long z)
{
    long w = 1;
    switch(x) {
        . . .
    }
    return w;
}
```

Setup:

```
switch_eg:
    movq    %rdx, %rcx
    cmpq    $6, %rdi      # x:6
    ja      .L8          # Use default
    jmp    * .L4(,%rdi,8) # goto *JTab[x]
```

Indirect  
jump 

Jump table

```
.section  .rodata
.align 8
.L4:
    .quad    .L8    # x = 0
    .quad    .L3    # x = 1
    .quad    .L5    # x = 2
    .quad    .L9    # x = 3
    .quad    .L8    # x = 4
    .quad    .L7    # x = 5
    .quad    .L7    # x = 6
```

# Assembly Setup Explanation

## ■ Table Structure

- Each target requires 8 bytes
- Base address at `.L4`

## ■ Jumping

- Direct: `jmp .L8`
- Jump target is denoted by label `.L8`

- Indirect: `jmp * .L4(,%rdi,8)`
- Start of jump table: `.L4`
- Must scale by factor of 8 (addresses are 8 bytes)
- Fetch target from effective Address `.L4 + x*8`
  - Only for  $0 \leq x \leq 6$

Jump table

```
.section    .rodata
.align 8
.L4:
.quad      .L8    # x = 0
.quad      .L3    # x = 1
.quad      .L5    # x = 2
.quad      .L9    # x = 3
.quad      .L8    # x = 4
.quad      .L7    # x = 5
.quad      .L7    # x = 6
```

# Jump Table

Jump table

```
.section .rodata
.align 8
```

```
.L4:
```

```
.quad .L8 # x = 0
.quad .L3 # x = 1
.quad .L5 # x = 2
.quad .L9 # x = 3
.quad .L8 # x = 4
.quad .L7 # x = 5
.quad .L7 # x = 6
```

```
switch(x) {
    case 1:          // .L3
        w = y*z;
        break;
    case 2:          // .L5
        w = y/z;
        /* Fall Through */
    case 3:          // .L9
        w += z;
        break;
    case 5:
    case 6:          // .L7
        w -= z;
        break;
    default:         // .L8
        w = 2;
}
```

# Code Blocks ( $x == 1$ )

```
switch(x) {  
    case 1:          // .L3  
        w = y*z;  
        break;  
    . . .  
}
```

```
.L3:  
    movq    %rsi, %rax  # y  
    imulq   %rdx, %rax  # y*z  
    ret
```

Register	Use(s)
%rdi	Argument <b>x</b>
%rsi	Argument <b>y</b>
%rdx	Argument <b>z</b>
%rax	Return value

# Handling Fall-Through

```
long w = 1;  
. . .  
switch(x) {  
    . . .  
    case 2:  
        w = y/z;  
        /* Fall Through */  
    case 3:  
        w += z;  
        break;  
    . . .  
}
```

```
case 2:  
    w = y/z;  
    goto merge;
```

```
case 3:  
    w = 1;  
  
merge:  
    w += z;
```

# Code Blocks ( $x == 2$ , $x == 3$ )

```
long w = 1;  
.  
.  
switch(x) {  
.  
. . .  
case 2:  
    w = y/z;  
    /* Fall Through */  
case 3:  
    w += z;  
    break;  
.  
.  
}
```

```
.L5:          # Case 2  
    movq    %rsi, %rax  
    cqto  
    idivq   %rcx      # y/z  
    jmp     .L6        # goto merge  
.L9:          # Case 3  
    movl    $1, %eax    # w = 1  
.L6:          # merge:  
    addq    %rcx, %rax # w += z  
    ret
```

Register	Use(s)
%rdi	Argument <b>x</b>
%rsi	Argument <b>y</b>
%rdx	Argument <b>z</b>
%rax	Return value

# Code Blocks ( $x == 5$ , $x == 6$ , default)

```
switch(x) {  
    . . .  
    case 5: // .L7  
    case 6: // .L7  
        w -= z;  
        break;  
    default: // .L8  
        w = 2;  
}
```

```
.L7:          # Case 5,6  
    movl $1, %eax  # w = 1  
    subq %rdx, %rax # w -= z  
    ret  
.L8:          # Default:  
    movl $2, %eax  # 2  
    ret
```

Register	Use(s)
%rdi	Argument <b>x</b>
%rsi	Argument <b>y</b>
%rdx	Argument <b>z</b>
%rax	Return value

# Summarizing

- C Control
  - if-then-else
  - do-while
  - while, for
  - switch
- Assembler Control
  - Conditional jump
  - Conditional move
  - Indirect jump (via jump tables)
  - Compiler generates code sequence to implement more complex control
- Standard Techniques
  - Loops converted to do-while or jump-to-middle form
  - Large switch statements use jump tables
  - Sparse switch statements may use decision trees (if-elseif-elseif-else)

# Summary

## ■ Today

- Control: Condition codes
- Conditional branches & conditional moves
- Loops
- Switch statements

## ■ Next Time

- Stack
- Call / return
- Procedure call discipline

# **COMP2310/COMP6310**

## **Systems, Networks, & Concurrency**

Convener: Prof John Taylor

# Machine-Level Programming III: Procedures

Acknowledgement of material: With changes suited to ANU needs, the slides are obtained from Carnegie Mellon University: <https://www.cs.cmu.edu/~213/>

# Mechanisms in Procedures

## ■ Passing control

- To beginning of procedure code
- Back to return point

## ■ Passing data


- Procedure arguments
- Return value

## ■ Memory management

- Allocate during procedure execution
- Deallocate upon return

## ■ Mechanisms all implemented with machine instructions

## ■ x86-64 implementation of a procedure uses only the required mechanisms

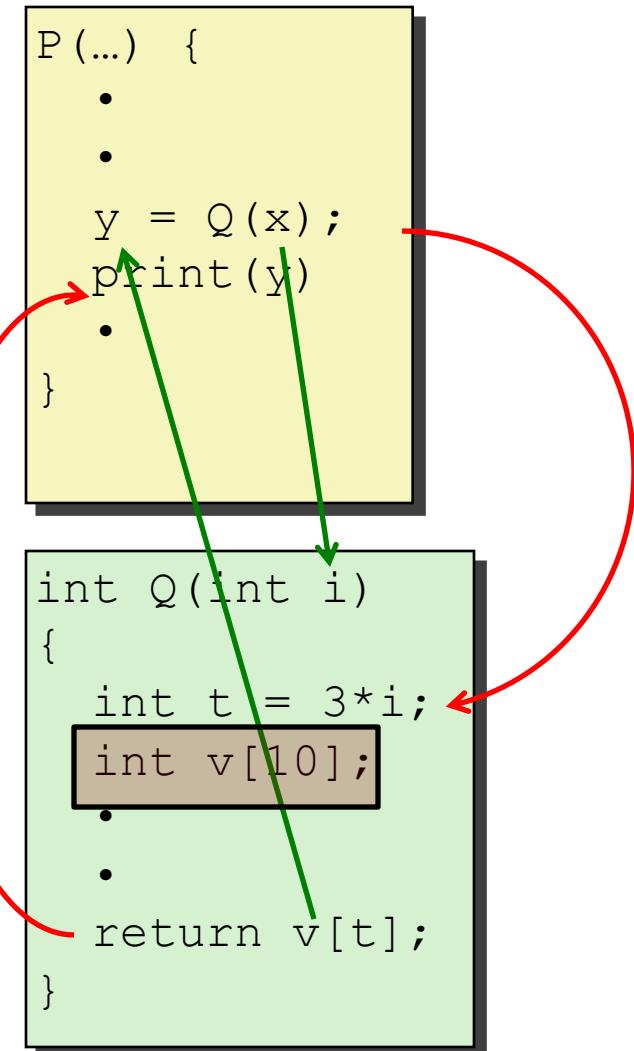


# Today

## ■ Procedures

- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# x86-64 Stack

- Region of memory managed with stack discipline
- Grows toward lower addresses
- Register `%rsp` contains lowest stack address
  - address of “top” element

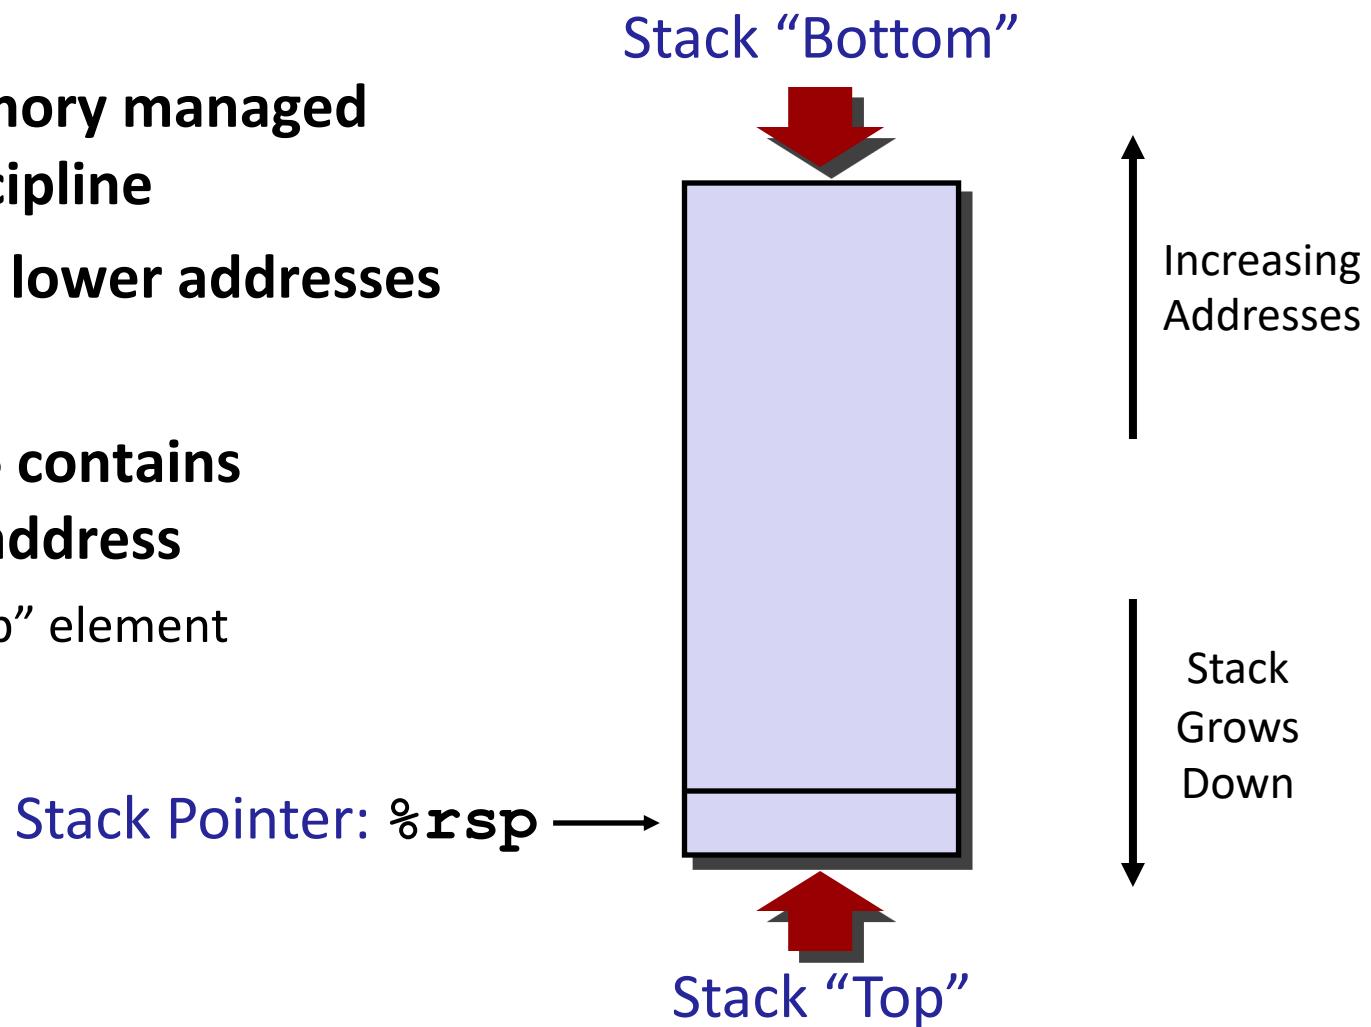


# x86-64 Stack: Push

## ■ **pushq Src**

- Fetch operand at Src
- Decrement `%rsp` by 8
- Write operand at address given by `%rsp`

Stack Pointer: `%rsp`


Stack “Bottom”

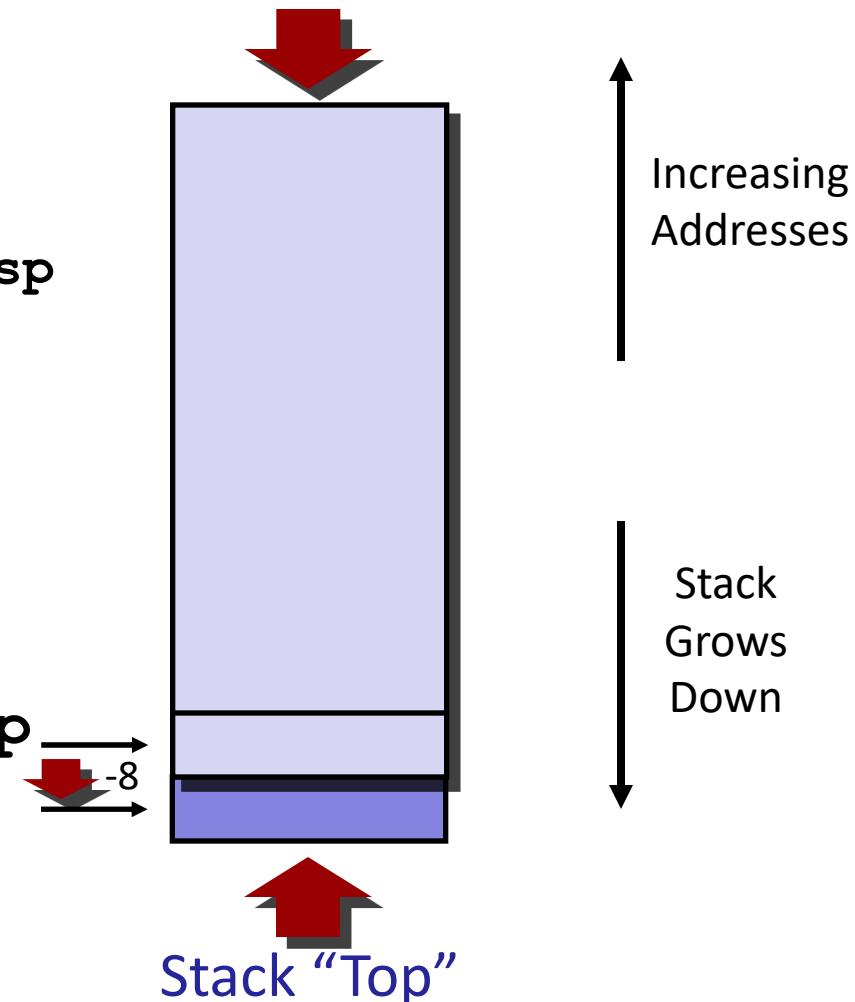

# x86-64 Stack: Pop

## ■ **popq Dest**

- Read value at address given by `%rsp`
- Increment `%rsp` by 8
- Store value at Dest (must be register)

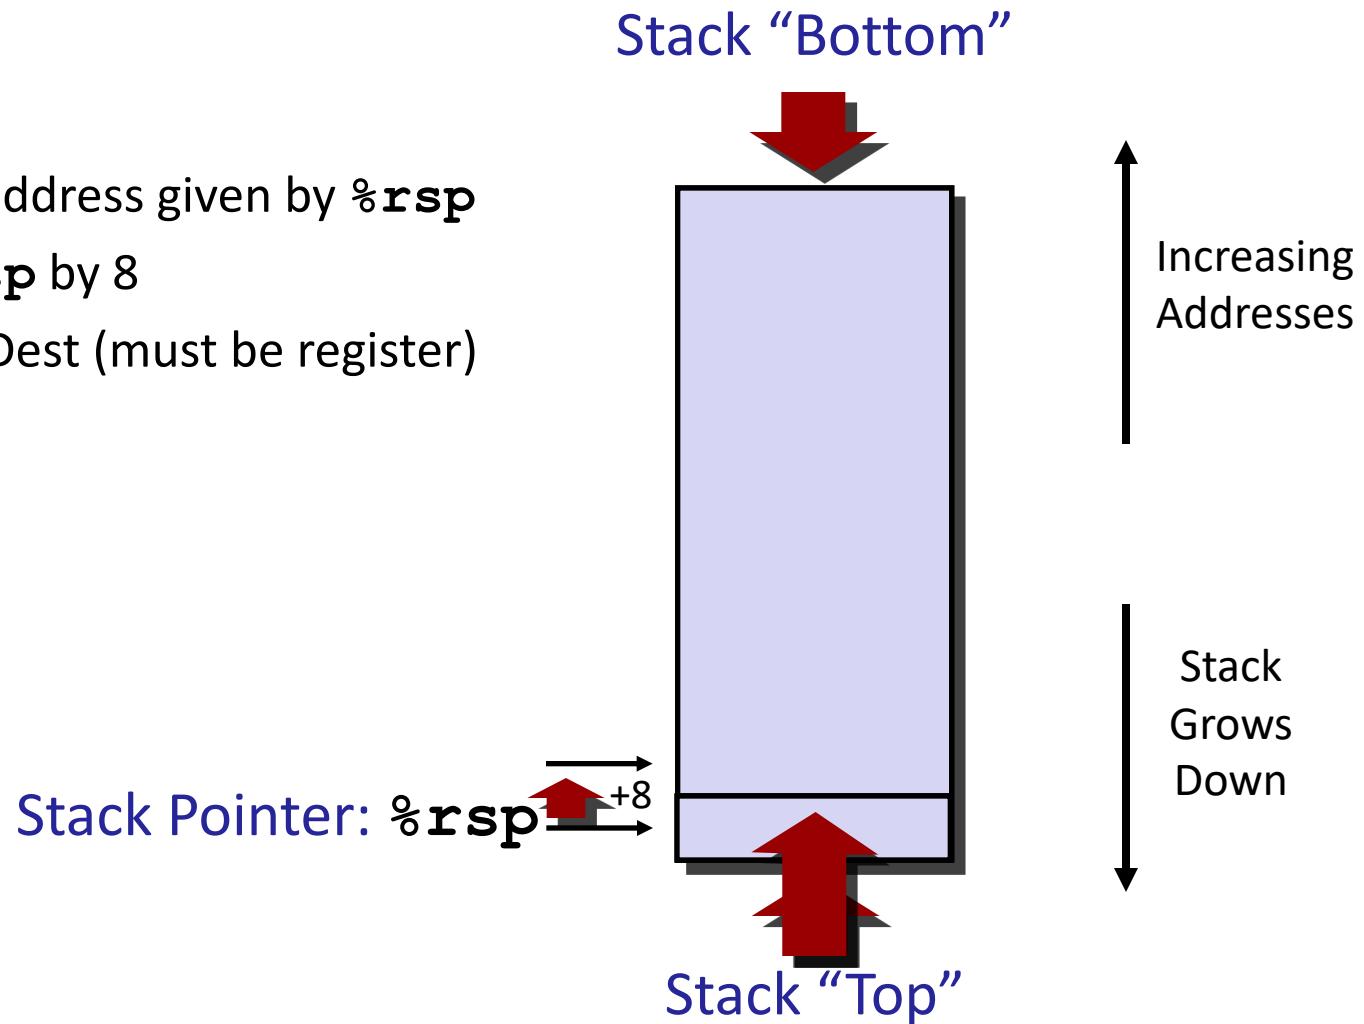

# Today

## ■ Procedures

- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# Code Examples

```
void multstore  
    (long x, long y, long *dest)  
{  
    long t = mult2(x, y);  
    *dest = t;  
}
```

```
000000000400540 <multstore>:  
400540: push    %rbx          # Save %rbx  
400541: mov     %rdx,%rbx    # Save dest  
400544: callq   400550 <mult2>  # mult2(x,y)  
400549: mov     %rax,(%rbx)    # Save at dest  
40054c: pop     %rbx          # Restore %rbx  
40054d: retq               # Return
```

```
long mult2  
    (long a, long b)  
{  
    long s = a * b;  
    return s;  
}
```

```
000000000400550 <mult2>:  
400550: mov     %rdi,%rax    # a  
400553: imul   %rsi,%rax    # a * b  
400557: retq               # Return
```

# Procedure Control Flow

- Use stack to support procedure call and return

- **Procedure call: `call label`**

- Push return address on stack
  - Jump to label

- **Return address:**

- Address of the next instruction right after call
  - Example from disassembly


- **Procedure return: `ret`**

- Pop address from stack
  - Jump to address

# Control Flow Example #1


```
0000000000400540 <multstore>:  
.  
.  
400544: callq  400550 <mult2>  
400549: mov     %rax, (%rbx)  
.  
.
```

```
0000000000400550 <mult2>:  
400550: mov     %rdi,%rax  
.  
.  
400557: retq
```

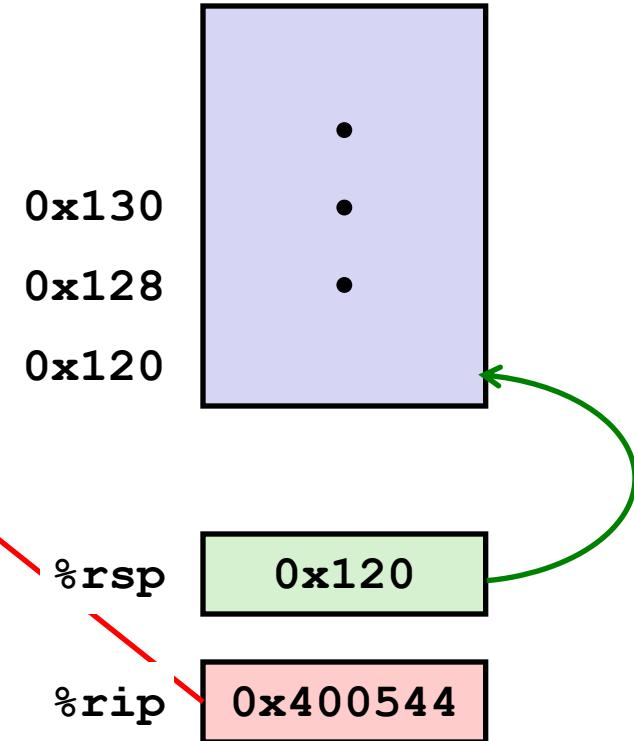

# Control Flow Example #2


```
0000000000400540 <multstore>:  
.  
.  
400544: callq  400550 <mult2>  
400549: mov     %rax, (%rbx) ←
```

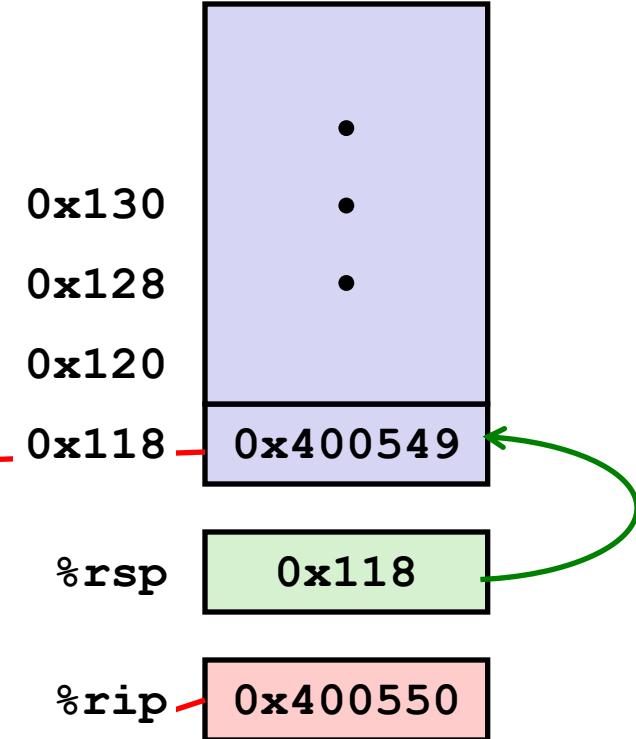

```
0000000000400550 <mult2>:  
400550: mov     %rdi, %rax ←  
. .  
400557: retq
```

# Control Flow Example #3


```
0000000000400540 <multstore>:  
.  
.  
400544: callq  400550 <mult2>  
400549: mov     %rax, (%rbx) ←
```

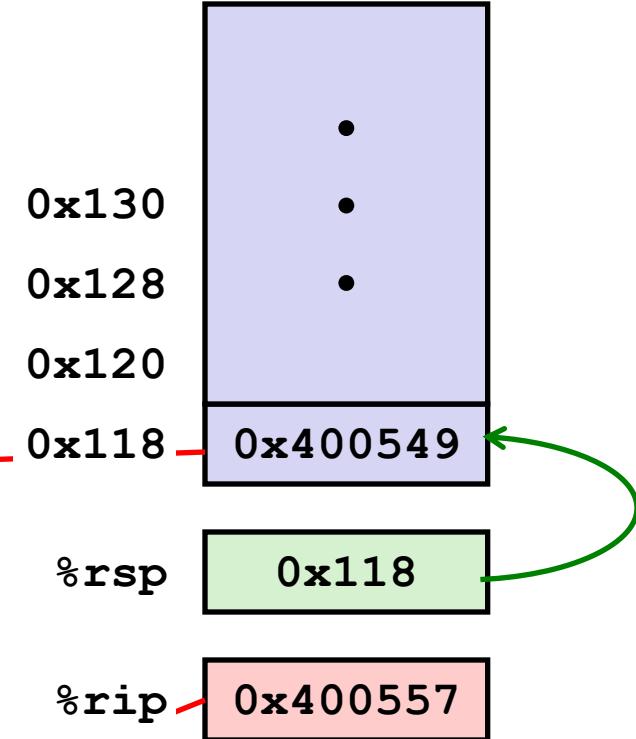

```
0000000000400550 <mult2>:  
400550: mov     %rdi,%rax  
. .  
400557: retq ←
```

# Control Flow Example #4

```
0000000000400540 <multstore>:  
.  
.  
400544: callq  400550 <mult2>  
400549: mov     %rax, (%rbx) ←  
.  
.
```

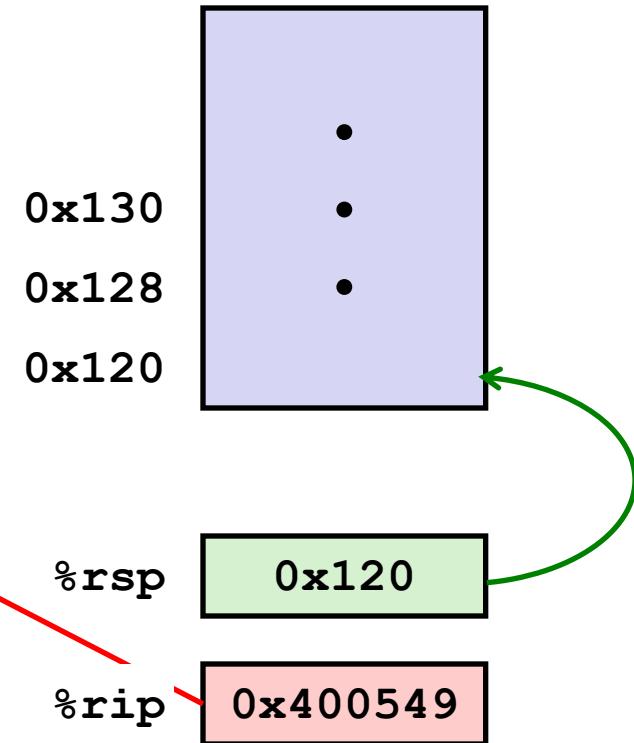

```
0000000000400550 <mult2>:  
400550: mov     %rdi, %rax  
. .  
400557: retq
```

# Today


## ■ Procedures

- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustrations of Recursion & Pointers


# Procedure Data Flow

## Registers

- First 6 arguments

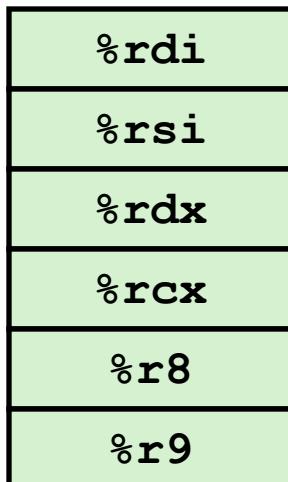

## Stack

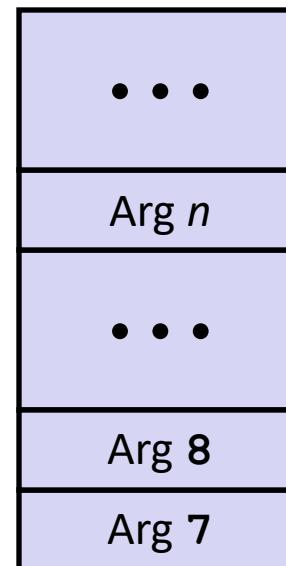

- Return value



- Only allocate stack space when needed

# Data Flow Examples

```
void multstore
    (long x, long y, long *dest)
{
    long t = mult2(x, y);
    *dest = t;
}
```

```
0000000000400540 <multstore>:
# x in %rdi, y in %rsi, dest in %rdx
...
400541: mov    %rdx,%rbx          # Save dest
400544: callq  400550 <mult2>    # mult2(x,y)
# t in %rax
400549: mov    %rax,(%rbx)       # Save at dest
...
```

```
long mult2
    (long a, long b)
{
    long s = a * b;
    return s;
}
```

```
0000000000400550 <mult2>:
# a in %rdi, b in %rsi
400550: mov    %rdi,%rax          # a
400553: imul   %rsi,%rax          # a * b
# s in %rax
400557: retq
```

# Return

# Today

## ■ Procedures

- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# Stack-Based Languages

## ■ Languages that support recursion

- e.g., C, Pascal, Java
- Code must be “Reentrant”
  - Multiple simultaneous instantiations of single procedure
- Need some place to store state of each instantiation
  - Arguments
  - Local variables
  - Return pointer

## ■ Stack discipline

- State for given procedure needed for limited time
  - From when called to when return
- Callee returns before caller does

## ■ Stack allocated in **Frames**

- state for single procedure instantiation


# Call Chain Example

```
yoo (...)  
{  
    •  
    •  
    who () ;  
    •  
    •  
}
```

```
who (...)  
{  
    • • •  
    amI () ;  
    • • •  
    amI () ;  
    • • •  
}
```

```
amI (...)  
{  
    •  
    •  
    amI () ;  
    •  
    •  
}
```

Example  
Call Chain

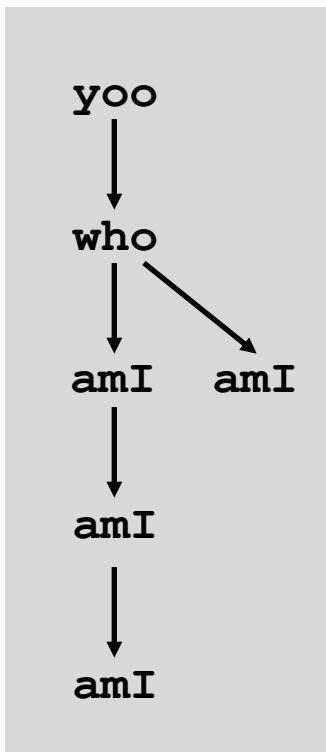


Procedure **amI ()** is recursive

# Stack Frames

## Contents

- Return information
- Local storage (if needed)
- Temporary space (if needed)


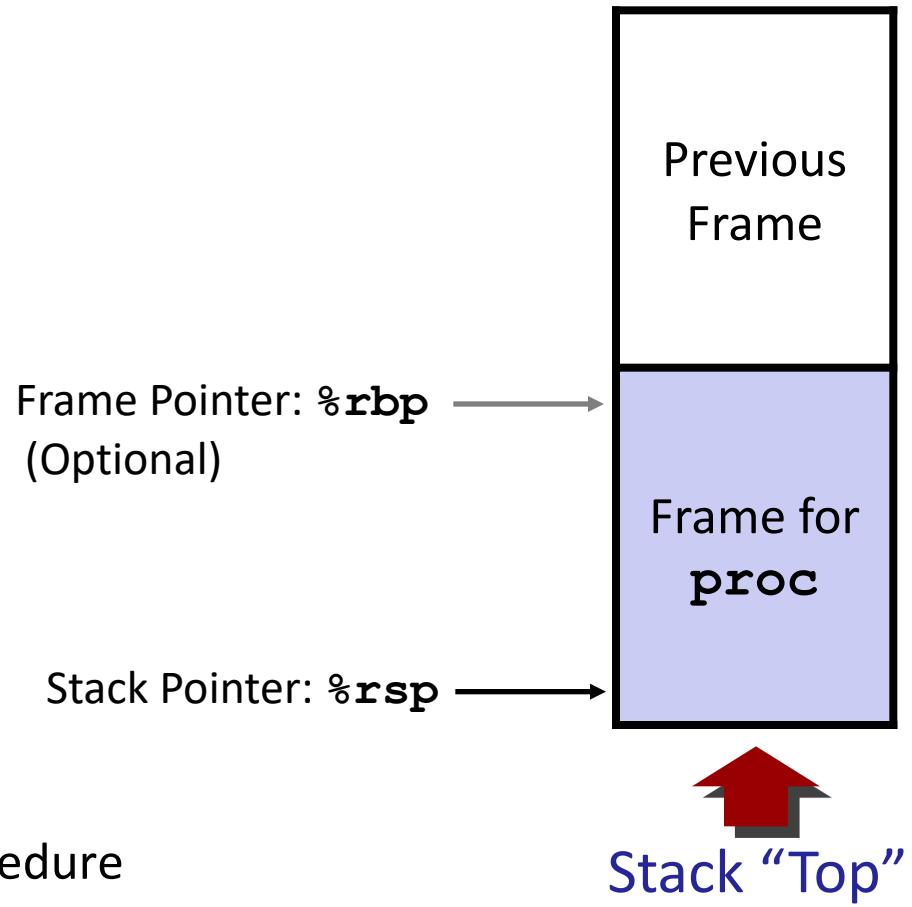


## Management




- Space allocated when enter procedure
  - “Set-up” code
  - Includes push by **call** instruction
- Deallocated when return
  - “Finish” code
  - Includes pop by **ret** instruction

# Example



```
yoo (...)  
{  
    •  
    •  
    who () ;  
    •  
    •  
}
```

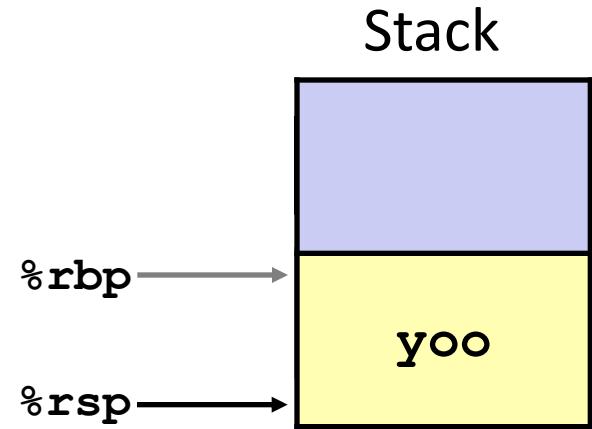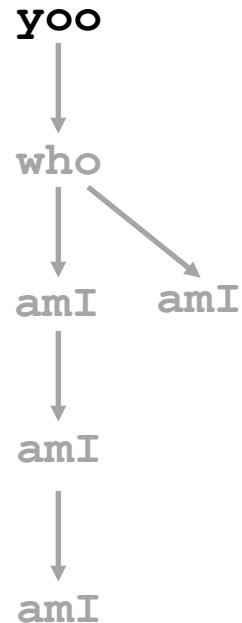


# Example

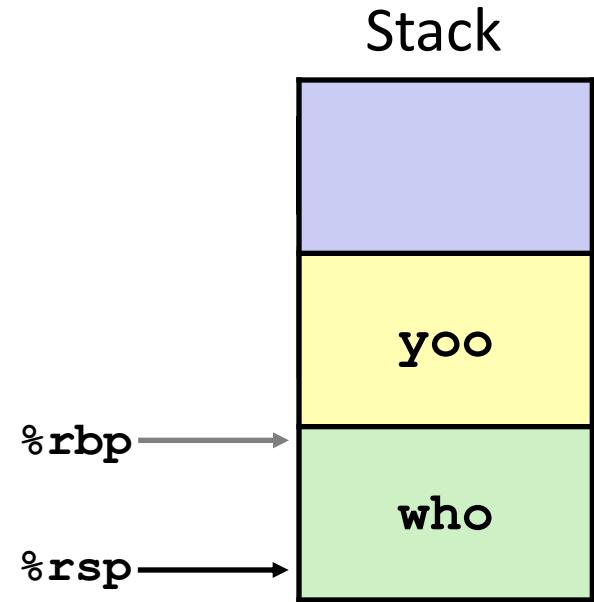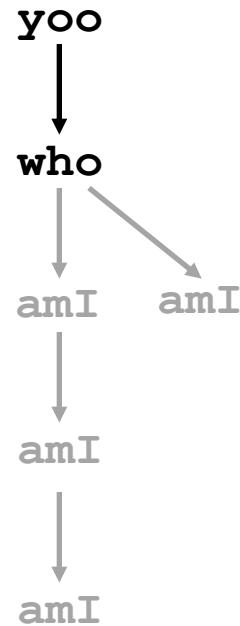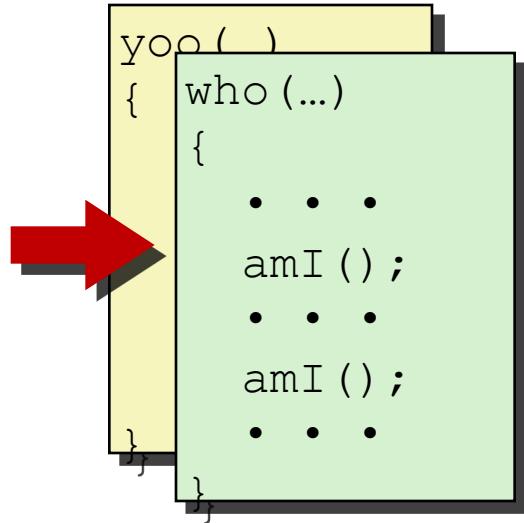




# Example

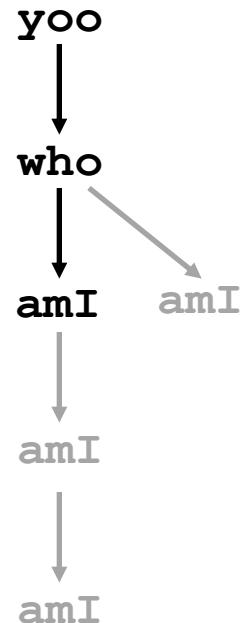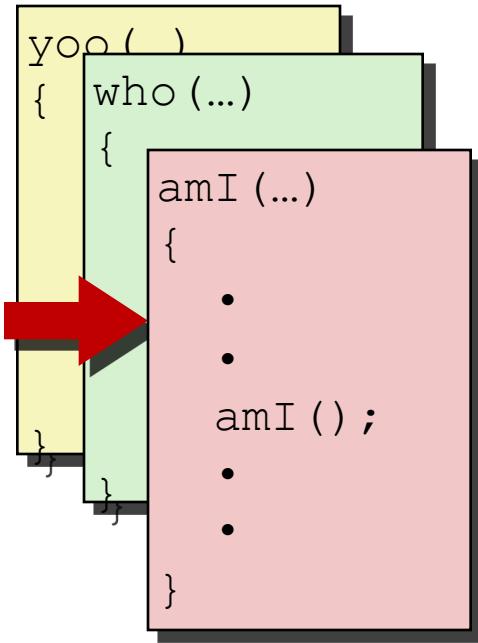




# Stack

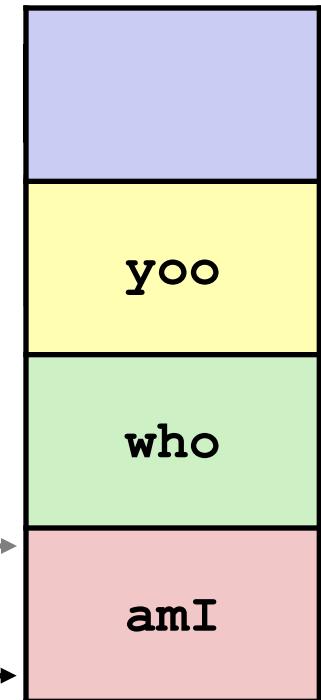




# Example

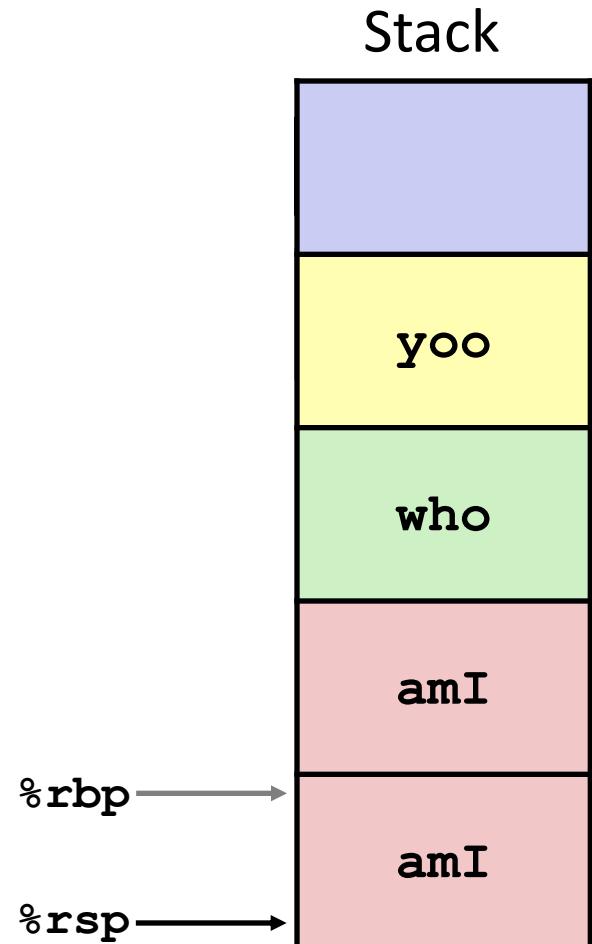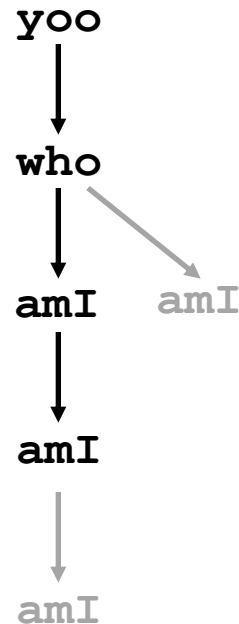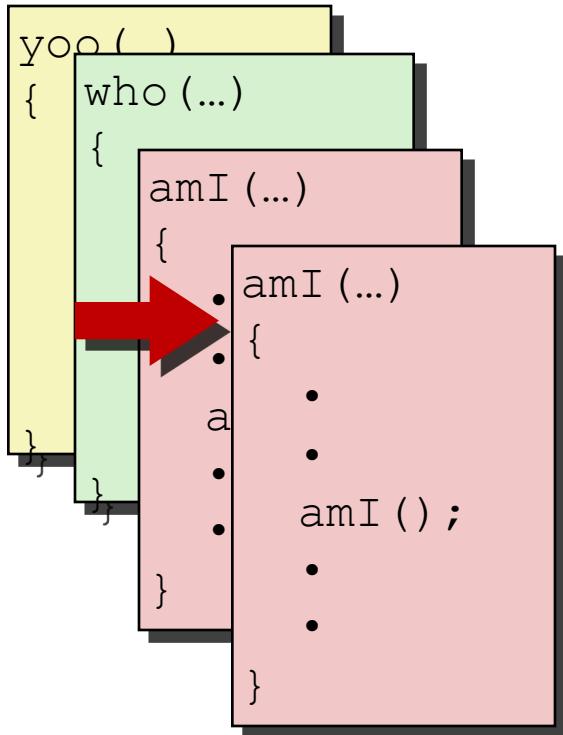

# Example

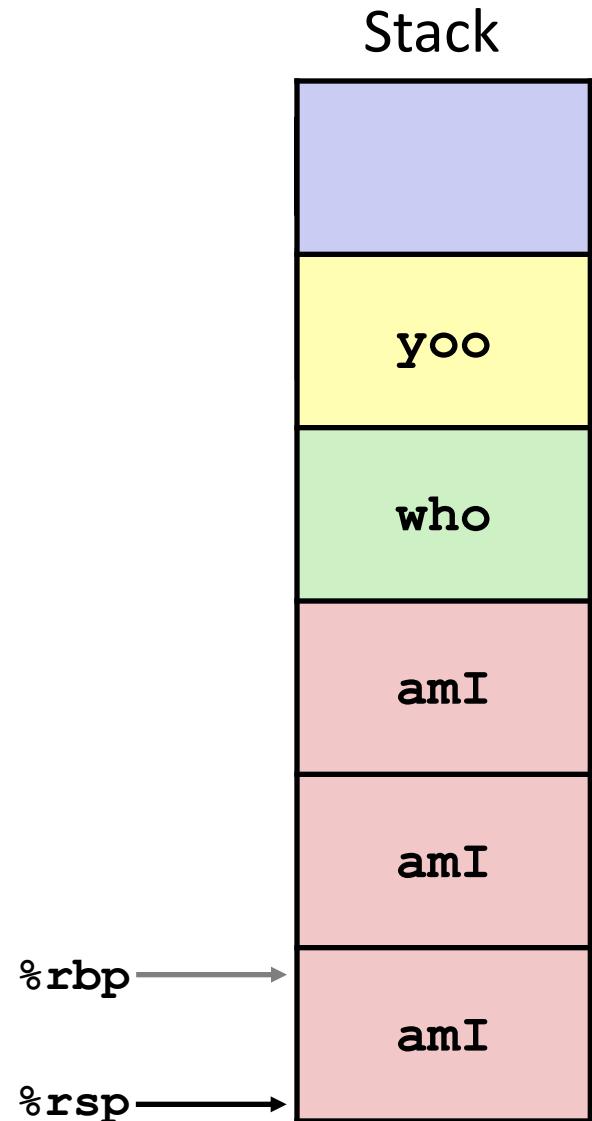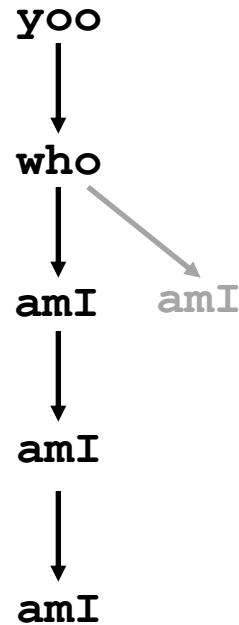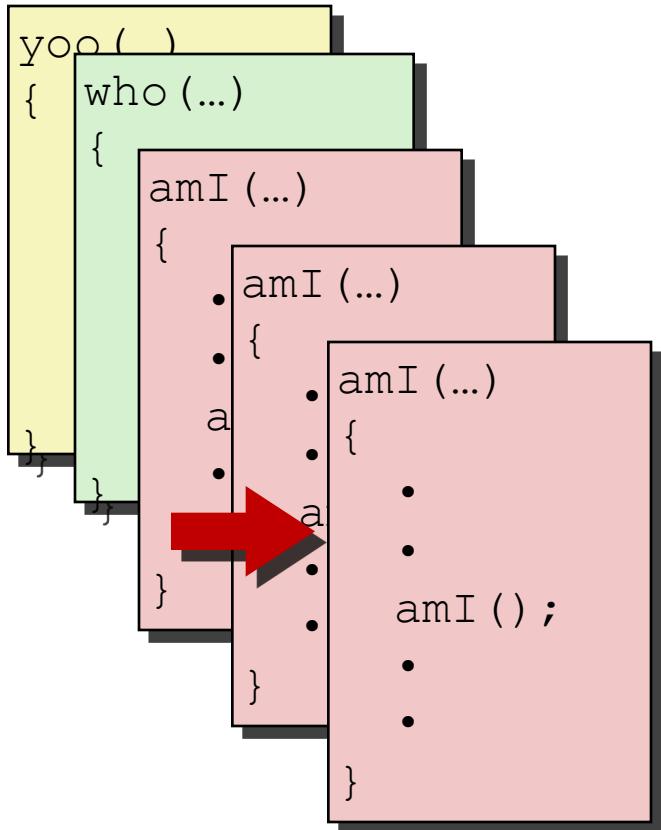


# Example

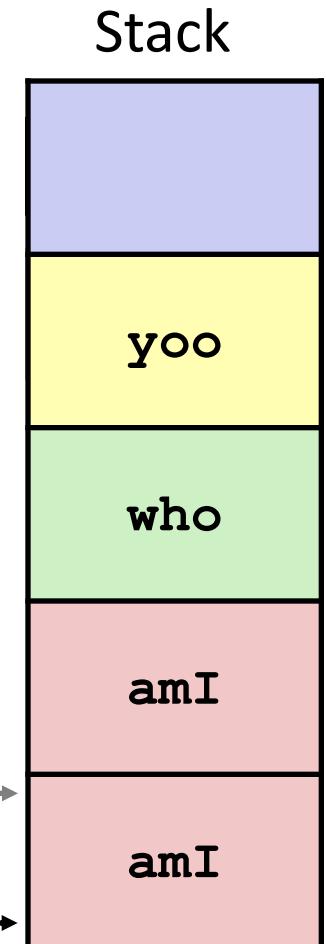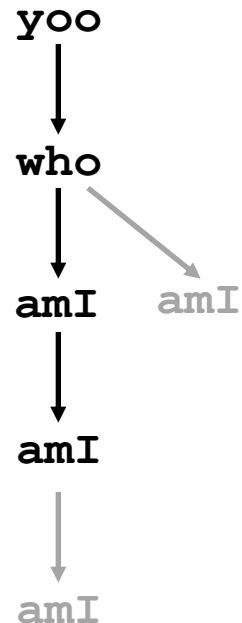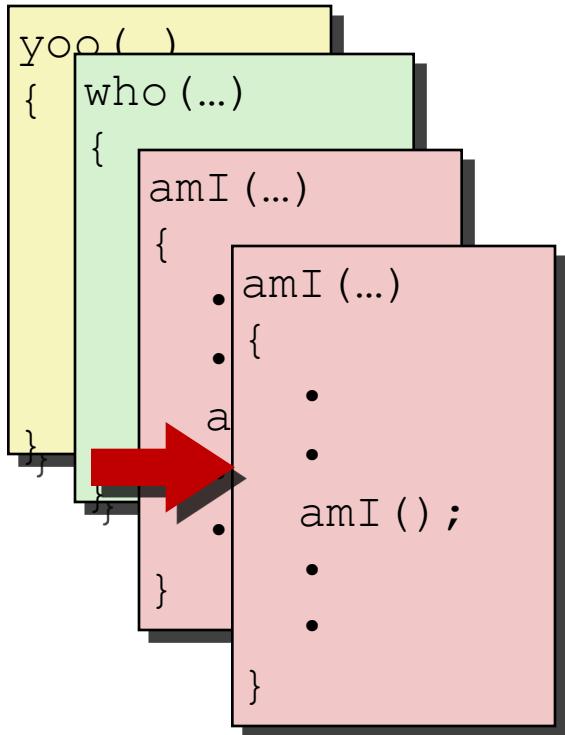


# Example

The diagram illustrates nested function scopes using colored boxes and curly braces. A large yellow box at the top contains the text "yoo( )". Below it is a green box containing "who (...)". Inside the green box is a pink box containing "amI (...)" followed by a brace {}, a red arrow pointing right, and five dots. At the bottom of the pink box is the text "amI () ;". The entire sequence is enclosed in a large brace {}, which is itself inside a black brace {}, indicating multiple levels of nesting.


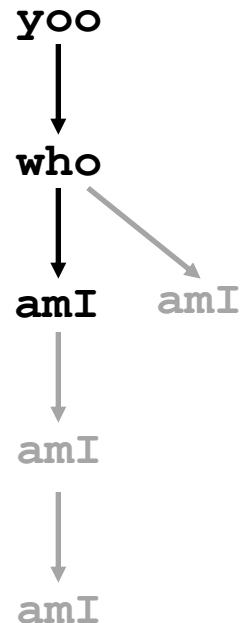


# Stack

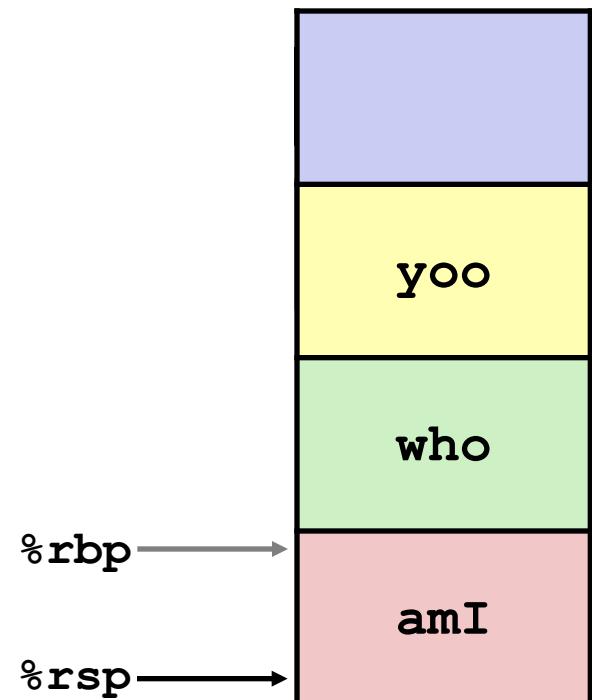


# Example




```
yoo( )  
{    who( ... )  
{  
    . . .  
    amI( );  
    . . .  
    amI( );  
    . . .  
}
```

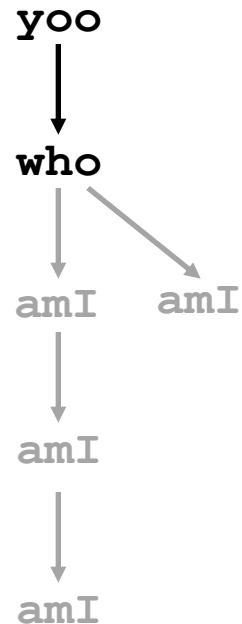

Stack

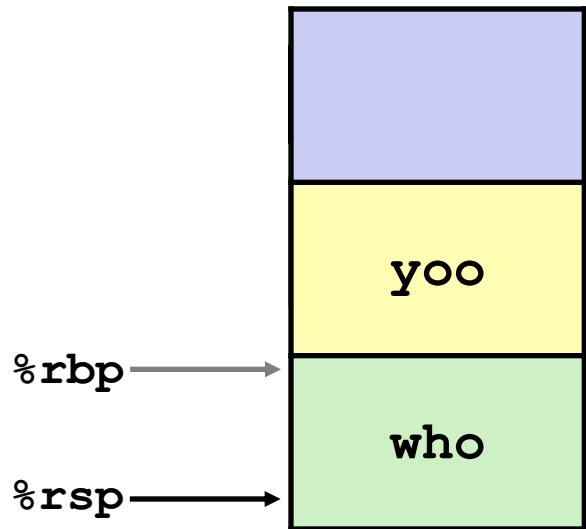


# Example

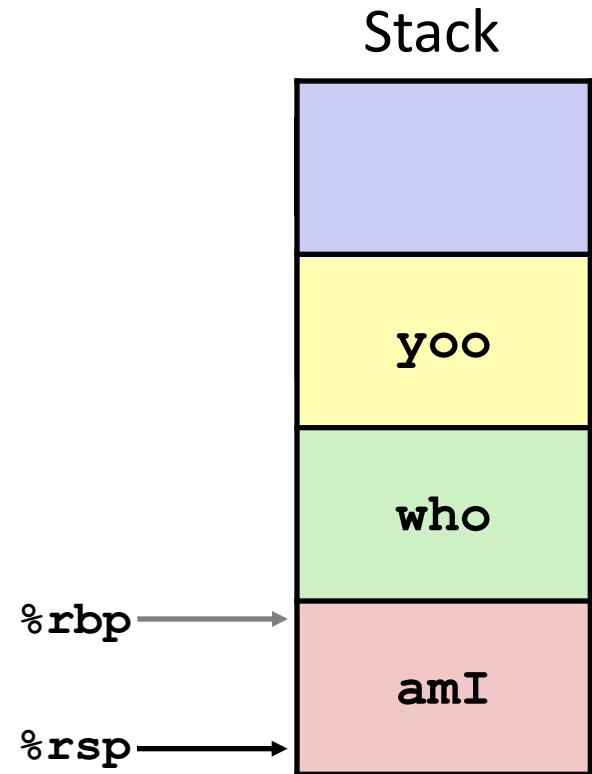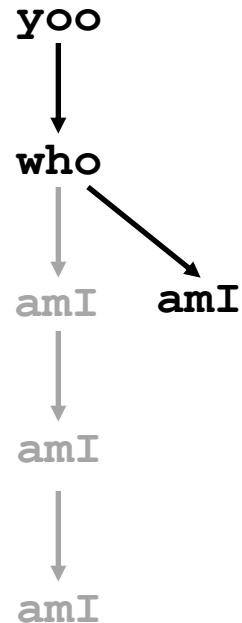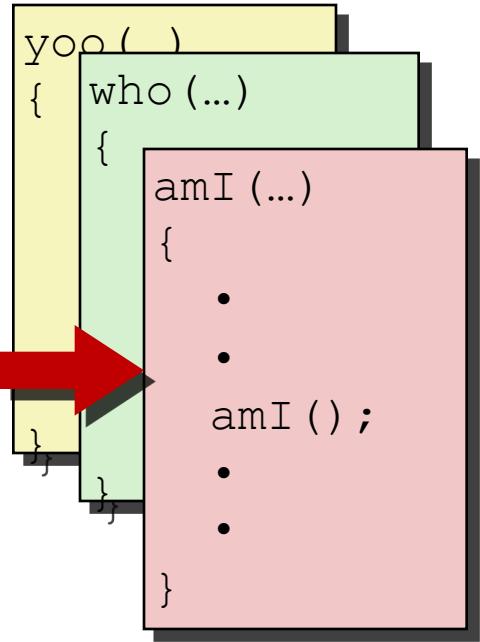


# Example

```
yoo( )  
{   who( ... )  
{  
    . . .  
    amI( );  
    . . .  
    amI( );  
    . . .  
}
```


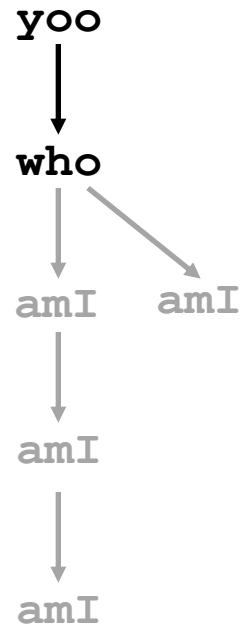


Stack

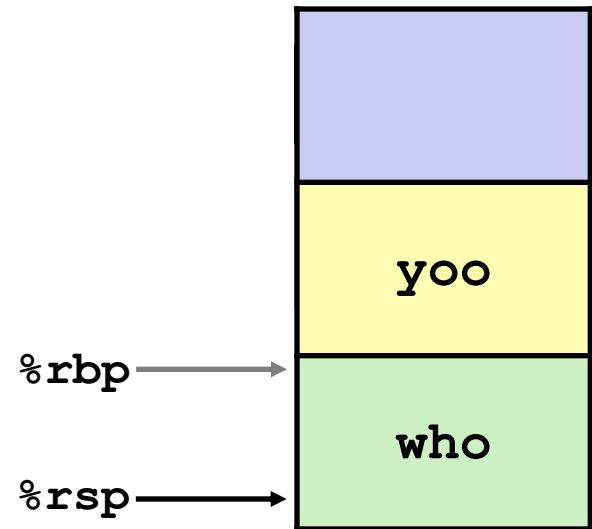

# Example


```
yoo (...)  
{  
    •  
    •  
    who () ;  
    •  
    •  
}
```

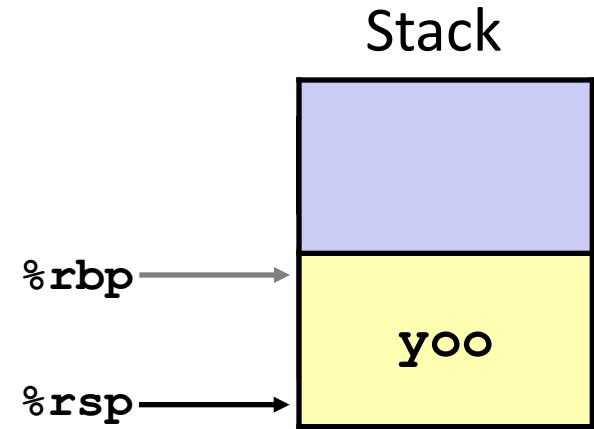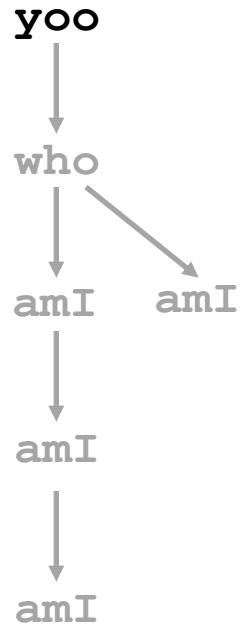

# x86-64/Linux Stack Frame

## ■ Current Stack Frame (“Top” to Bottom)

- “Argument build:”  
Parameters for function about to call
- Local variables  
If can’t keep in registers
- Saved register context
- Old frame pointer (optional)

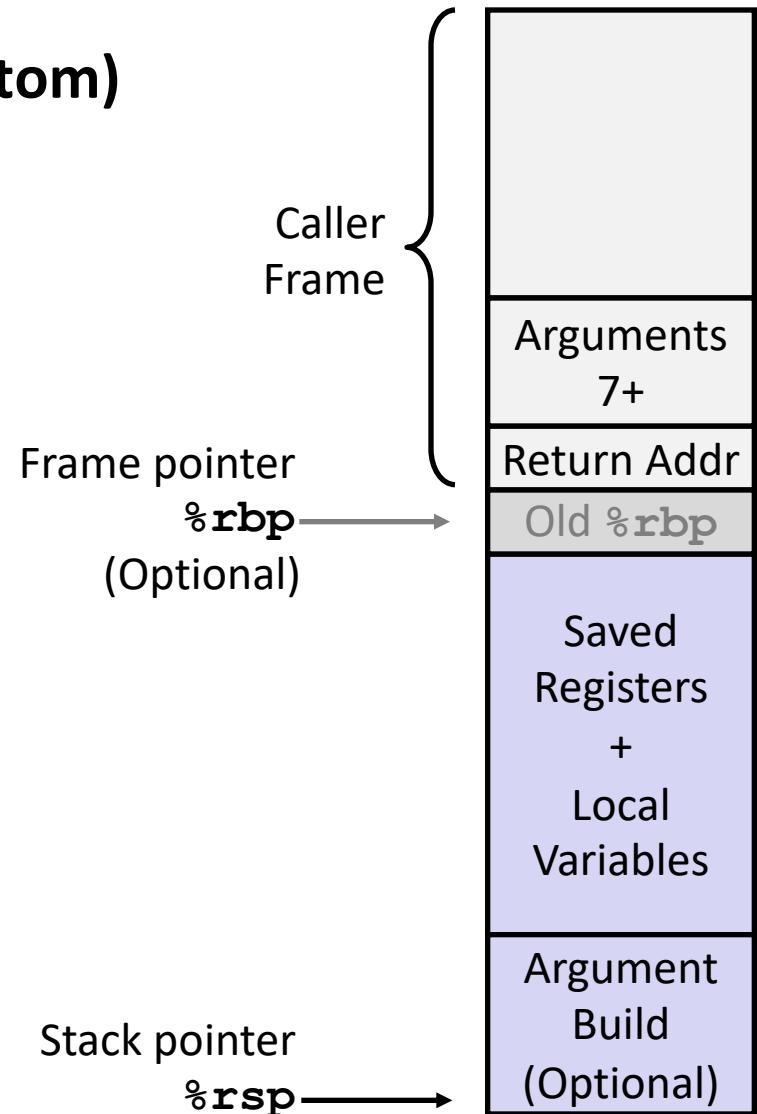

## ■ Caller Stack Frame

- Return address
  - Pushed by **call** instruction
- Arguments for this call

# Example: `incr`

```
long incr(long *p, long val) {  
    long x = *p;  
    long y = x + val;  
    *p = y;  
    return x;  
}
```


```
incr:  
    movq    (%rdi), %rax  
    addq    %rax, %rsi  
    movq    %rsi, (%rdi)  
    ret
```

Register	Use(s)
%rdi	Argument <b>p</b>
%rsi	Argument <b>val</b> , <b>y</b>
%rax	<b>x</b> , Return value

# Example: Calling `incr` #1


```
long call_incr() {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return v1+v2;  
}
```

Initial Stack Structure

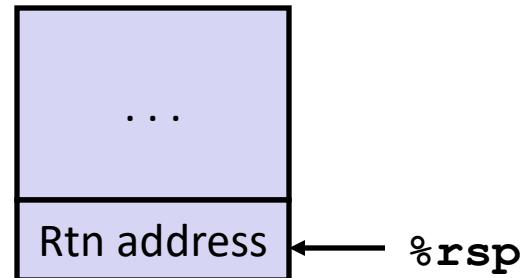

```
call_incr:  
    subq    $16, %rsp  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Resulting Stack Structure

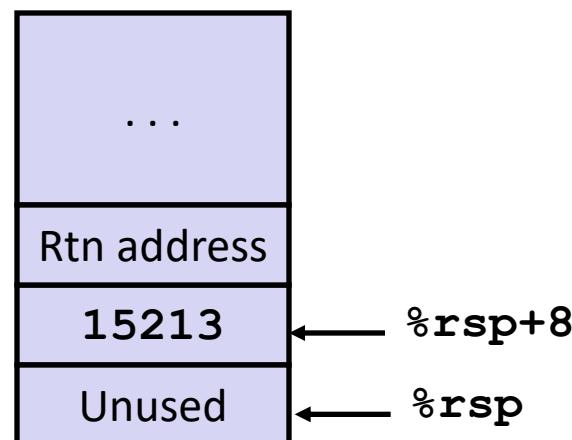


# Example: Calling incr #2

```
long call_incr() {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return v1+v2;  
}
```

```
call_incr:  
    subq    $16, %rsp  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Stack Structure

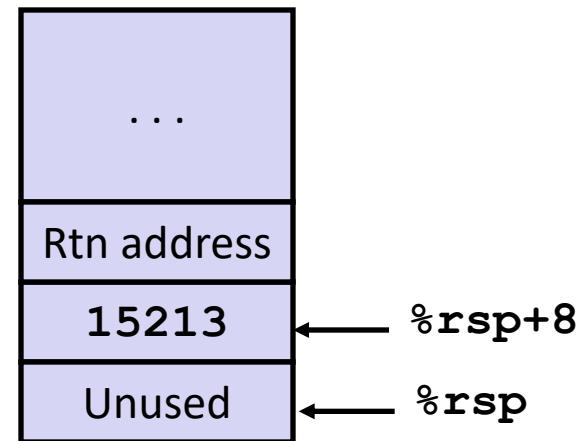


Register	Use(s)
%rdi	&v1
%rsi	3000

# Example: Calling `incr` #3

```
long call_incr() {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return v1+v2;  
}
```

```
call_incr:  
    subq    $16, %rsp  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Stack Structure

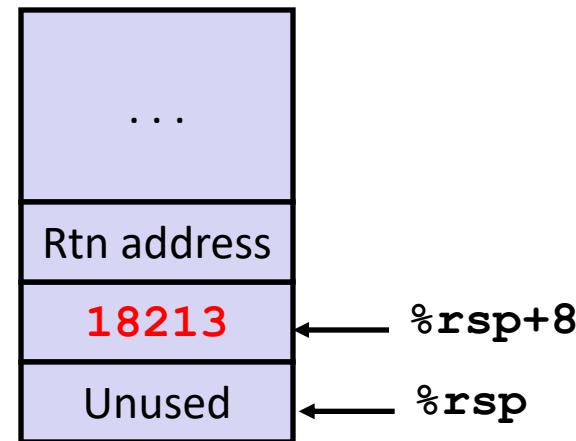


Register	Use(s)
%rdi	&v1
%rsi	3000

# Example: Calling incr #4

Stack Structure


```
long call_incr() {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return v1+v2;  
}
```

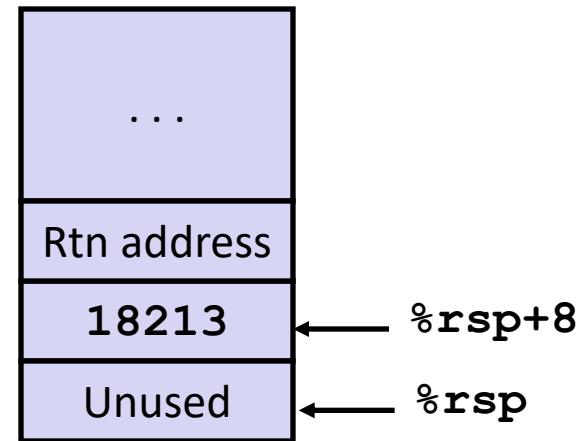

```
call_incr:  
    subq    $16, %rsp  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Register	Use(s)
%rax	Return value


Updated Stack Structure

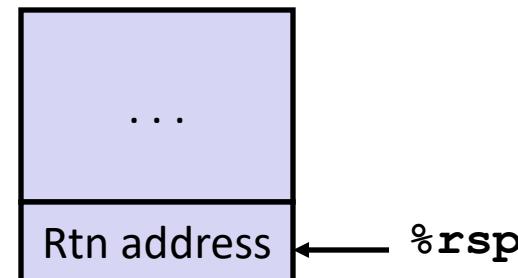

# Example: Calling incr #5

```
long call_incr() {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return v1+v2;  
}
```


Updated Stack Structure

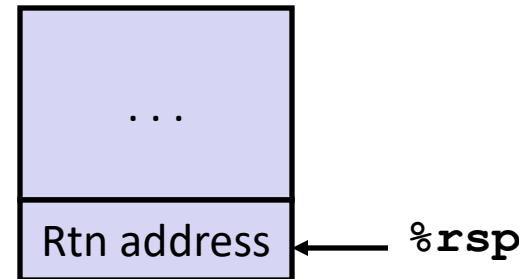

```
call_incr:  
    subq    $16, %rsp  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Register	Use(s)
%rax	Return value

Final Stack Structure

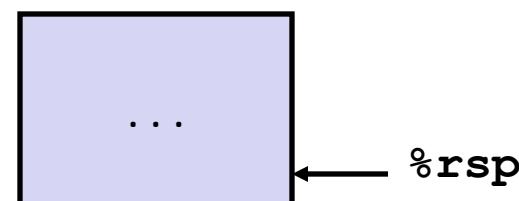

# Register Saving Conventions

## ■ When procedure **yoo** calls **who**:

- **yoo** is the **caller**
- **who** is the **callee**

## ■ Can register be used for temporary storage?

```
yoo:
```

```
• • •  
    movq $15213, %rdx  
    call who  
    addq %rdx, %rax  
• • •  
    ret
```

```
who:
```

```
• • •  
    subq $18213, %rdx  
• • •  
    ret
```

- Contents of register **%rdx** overwritten by **who**
- This could be trouble → something should be done!
  - Need some coordination

# Register Saving Conventions

- When procedure **yoo** calls **who**:
  - **yoo** is the **caller**
  - **who** is the **callee**
- Can register be used for temporary storage?
- Conventions
  - “Caller Saved”
    - Caller saves temporary values in its frame before the call
  - “Callee Saved”
    - Callee saves temporary values in its frame before using
    - Callee restores them before returning to caller

# x86-64 Linux Register Usage #1

## ■ **%rax**


- Return value
- Also caller-saved
- Can be modified by procedure

## ■ **%rdi, ..., %r9**

- Arguments
- Also caller-saved
- Can be modified by procedure

## ■ **%r10, %r11**

- Caller-saved
- Can be modified by procedure

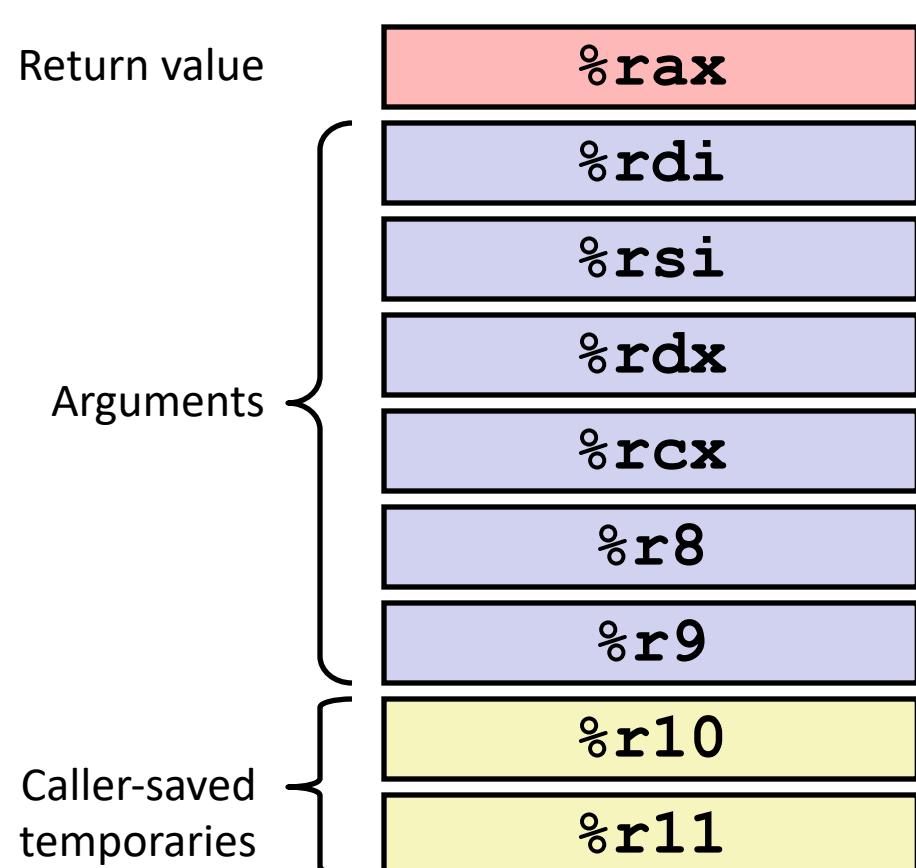

# x86-64 Linux Register Usage #2

## ■ **%rbx, %r12, %r13, %r14**


- Callee-saved
- Callee must save & restore

## ■ **%rbp**

- Callee-saved
- Callee must save & restore
- May be used as frame pointer
- Can mix & match

## ■ **%rsp**


- Special form of callee save
- Restored to original value upon exit from procedure

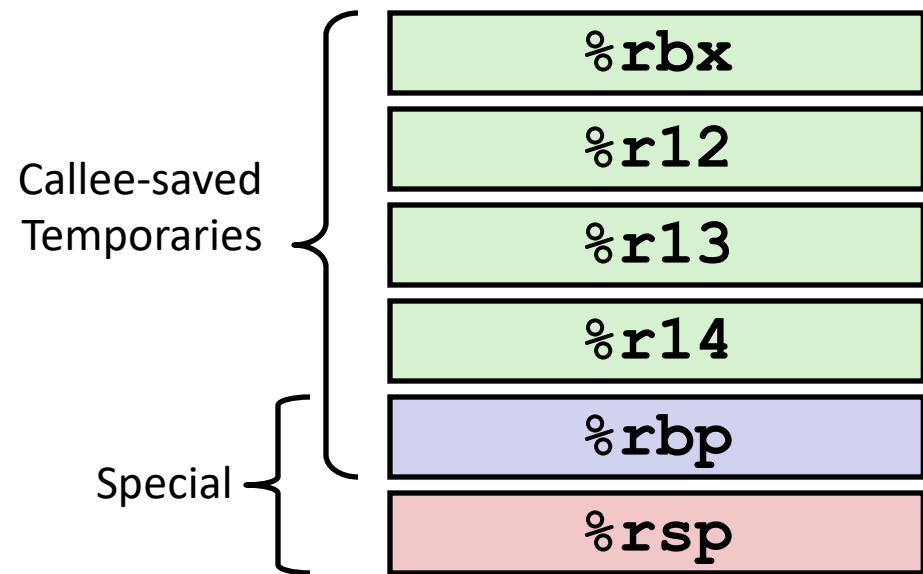

# Callee-Saved Example #1


```
long call_incr2(long x) {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return x+v2;  
}
```

Initial Stack Structure

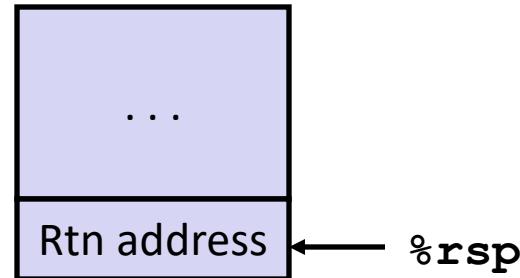

```
call_incr2:  
    pushq  %rbx  
    subq    $16, %rsp  
    movq    %rdi, %rbx  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    %rbx, %rax  
    addq    $16, %rsp  
    popq    %rbx  
    ret
```

Resulting Stack Structure

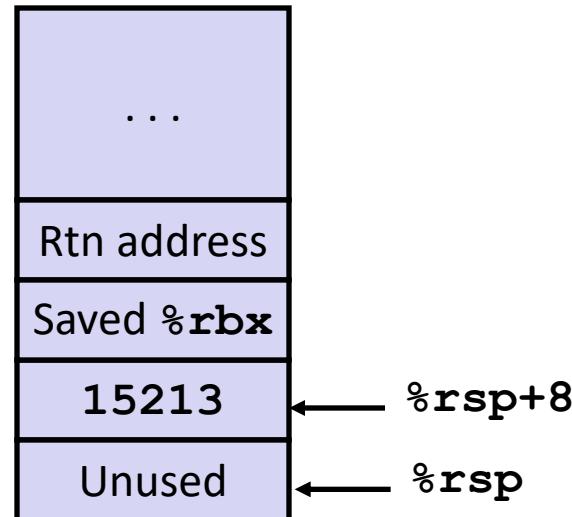


# Callee-Saved Example #2


Resulting Stack Structure

```
long call_incr2(long x) {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return x+v2;  
}
```

```
call_incr2:  
    pushq  %rbx  
    subq    $16, %rsp  
    movq    %rdi, %rbx  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    %rbx, %rax  
    addq    $16, %rsp  
    popq    %rbx  
    ret
```

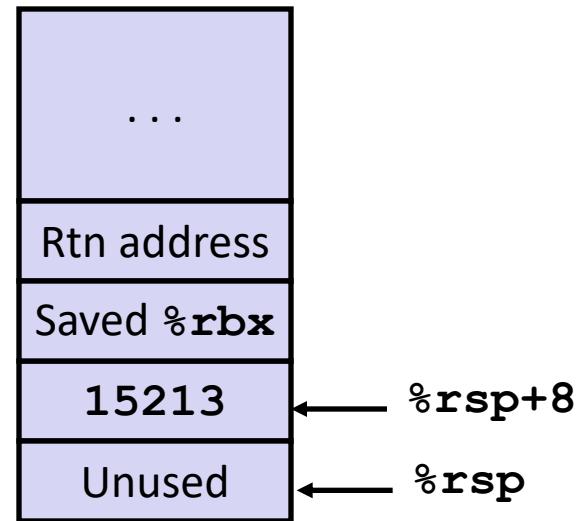

Pre-return Stack Structure

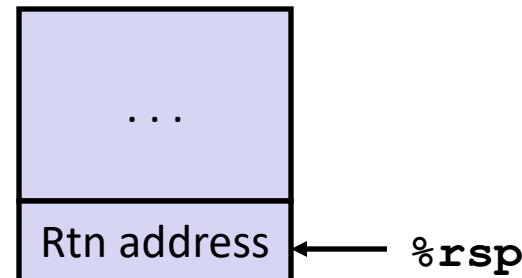

# Today

## ■ Procedures

- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# Recursive Function

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

pcount\_r:

```
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq   %rdi, %rbx
    andl   $1, %ebx
    shrq   %rdi # (by 1)
    call   pcount_r
    addq   %rbx, %rax
    popq   %rbx
.L6:
    rep; ret
```

# Recursive Function Terminal Case

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

pcount\_r:

```
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq   %rdi, %rbx
    andl   $1, %ebx
    shrq   %rdi # (by 1)
    call   pcount_r
    addq   %rbx, %rax
    popq   %rbx
```

.L6:

rep; ret

Register	Use(s)	Type
%rdi	x	Argument
%rax	Return value	Return value

# Recursive Function Register Save

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```


pcount\_r:

```
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq   %rdi, %rbx
    andl   $1, %ebx
    shrq   %rdi # (by 1)
    call   pcount_r
    addq   %rbx, %rax
    popq   %rbx
```

.L6:

```
    rep; ret
```

Register	Use(s)	Type
%rdi	x	Argument

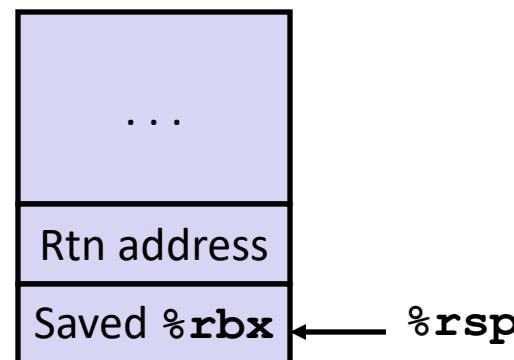

# Recursive Function Call Setup

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

pcount\_r:

```
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi # (by 1)
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
```

.L6:

```
    rep; ret
```

Register	Use(s)	Type
%rdi	x >> 1	Rec. argument
%rbx	x & 1	Callee-saved

# Recursive Function Call

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

pcount\_r:

movl	\$0, %eax
testq	%rdi, %rdi
je	.L6
pushq	%rbx
movq	%rdi, %rbx
andl	\$1, %ebx
shrq	%rdi # (by 1)
call	pcount_r
addq	%rbx, %rax
popq	%rbx

.L6:

rep; ret

Register	Use(s)	Type
%rbx	x & 1	Callee-saved
%rax	Recursive call return value	

# Recursive Function Result

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

pcount\_r:

movl	\$0, %eax
testq	%rdi, %rdi
je	.L6
pushq	%rbx
movq	%rdi, %rbx
andl	\$1, %ebx
shrq	%rdi # (by 1)
call	pcount_r
addq	%rbx, %rax
popq	%rbx

.L6:

rep; ret

Register	Use(s)	Type
%rbx	x & 1	Callee-saved
%rax	Return value	

# Recursive Function Completion

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```


pcount\_r:

```
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq   %rdi, %rbx
    andl   $1, %ebx
    shrq   %rdi # (by 1)
    call   pcount_r
    addq   %rbx, %rax
    popq   %rbx
```

.L6:

**rep; ret**

Register	Use(s)	Type
%rax	Return value	Return value

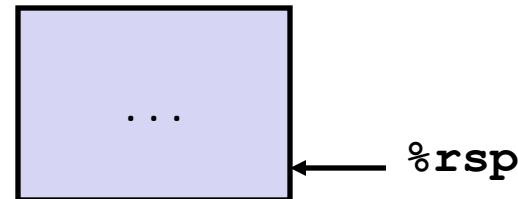

# Observations About Recursion

## ■ Handled Without Special Consideration

- Stack frames mean that each function call has private storage
  - Saved registers & local variables
  - Saved return pointer
- Register saving conventions prevent one function call from corrupting another's data
  - Unless the C code explicitly does so (e.g., buffer overflow)
- Stack discipline follows call / return pattern
  - If P calls Q, then Q returns before P
  - Last-In, First-Out

## ■ Also works for mutual recursion

- P calls Q; Q calls P

# x86-64 Procedure Summary

## ■ Important Points


- Stack is the right data structure for procedure call / return
  - If P calls Q, then Q returns before P

## ■ Recursion (& mutual recursion) handled by normal calling conventions

- Can safely store values in local stack frame and in callee-saved registers
- Put function arguments at top of stack
- Result return in **%rax**

## ■ Pointers are addresses of values

- On stack or global

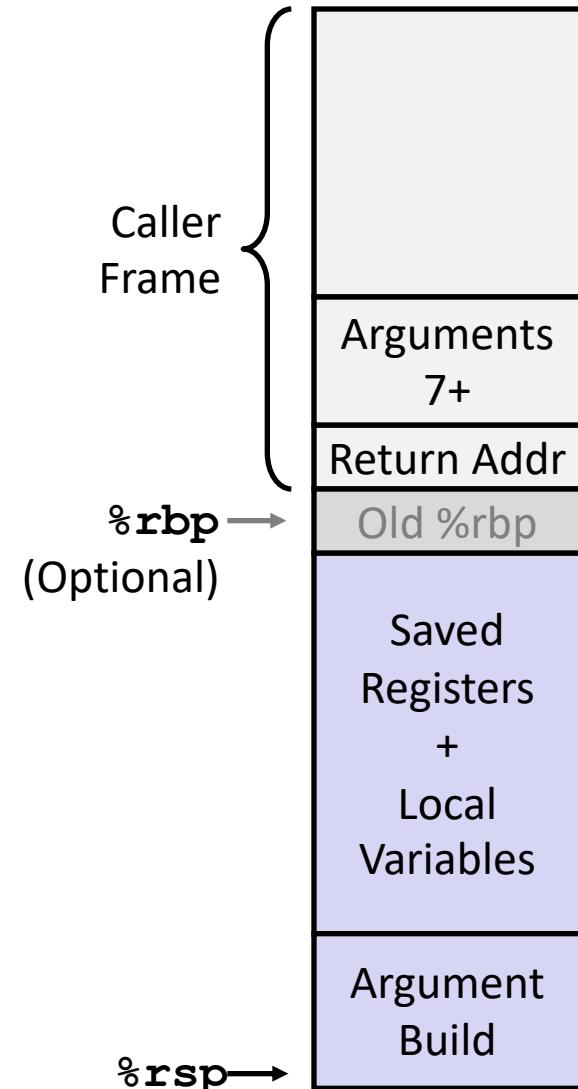

# **COMP2310/COMP6310**

## **Systems, Networks, & Concurrency**

Convener: Prof John Taylor

# Machine-Level Programming IV: Data

**Acknowledgement of material:** With changes suited to ANU needs, the slides are obtained from Carnegie Mellon University: <https://www.cs.cmu.edu/~213/>

# Today

## ■ Arrays

- One-dimensional
- Multi-dimensional (nested)
- Multi-level

## ■ Structures

- Allocation
- Access
- Alignment


# Array Allocation

## ■ Basic Principle

$T \mathbf{A}[L];$

- Array of data type  $T$  and length  $L$
- Contiguously allocated region of  $L * \text{sizeof}(T)$  bytes in memory

`char string[12];`

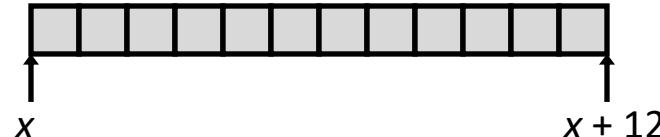


`int val[5];`



`double a[3];`



`char *p[3];`

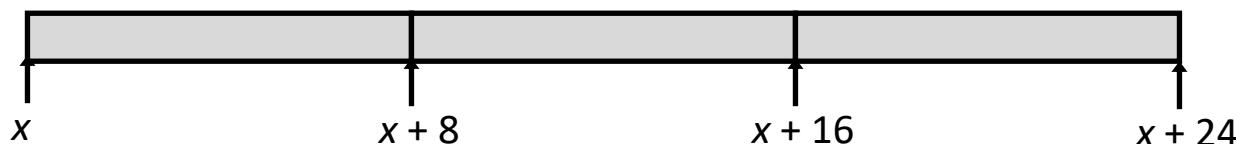


# Array Access

## ■ Basic Principle

$T \mathbf{A}[L]$  ;

- Array of data type  $T$  and length  $L$
- Identifier  $\mathbf{A}$  can be used as a pointer to array element 0: Type  $T^*$

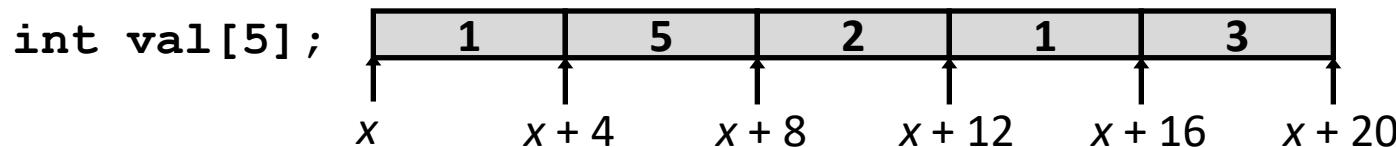


■ Reference	Type	Value
<code>val[4]</code>	<code>int</code>	3
<code>val</code>	<code>int *</code>	$x$
<code>val+1</code>	<code>int *</code>	$x + 4$
<code>&amp;val[2]</code>	<code>int *</code>	$x + 8$
<code>val[5]</code>	<code>int</code>	??
<code>*(val+1)</code>	<code>int</code>	5
<code>val + i</code>	<code>int *</code>	$x + 4i$

# Array Example

```
#define ZLEN 5
typedef int zip_dig[ZLEN];


zip_dig cmu = { 1, 5, 2, 1, 3 };
zip_dig mit = { 0, 2, 1, 3, 9 };
zip_dig ucb = { 9, 4, 7, 2, 0 };
```

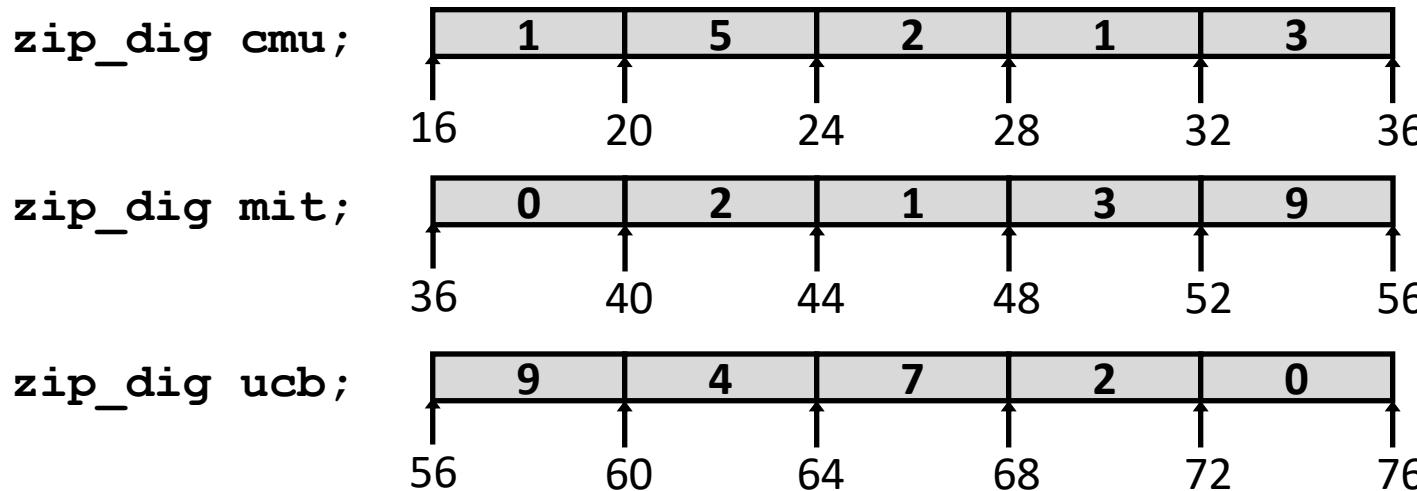

- Declaration “`zip_dig cmu`” equivalent to “`int cmu[5]`”
- Example arrays were allocated in successive 20 byte blocks
  - Not guaranteed to happen in general

# Array Accessing Example

```
zip_dig cmu;
```

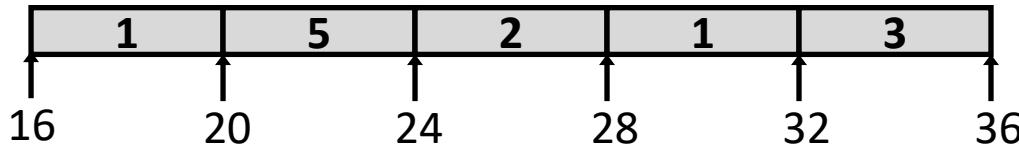

```
int get_digit
    (zip_dig z, int digit)
{
    return z[digit];
}
```

## IA32

```
# %rdi = z
# %rsi = digit
movl (%rdi,%rsi,4), %eax # z[digit]
```

- Register `%rdi` contains starting address of array
- Register `%rsi` contains array index
- Desired digit at  $\%rdi + 4 * \%rsi$
- Use memory reference `(%rdi,%rsi,4)`

# Array Loop Example

```
void zincr(zip_dig z) {
    size_t i;
    for (i = 0; i < ZLEN; i++)
        z[i]++;
}
```

```
# %rdi = z
movl    $0, %eax          # i = 0
jmp     .L3                # goto middle
.L4:               # loop:
    addl    $1, (%rdi,%rax,4) # z[i]++
    addq    $1, %rax          # i++
.L3:               # middle
    cmpq    $4, %rax          # i:4
    jbe     .L4                # if <=, goto loop
rep; ret
```

# Multidimensional (Nested) Arrays

## ■ Declaration

$T \ A[R][C];$

- 2D array of data type  $T$
- $R$  rows,  $C$  columns
- Type  $T$  element requires  $K$  bytes


## ■ Array Size

- $R * C * K$  bytes

## ■ Arrangement


- Row-Major Ordering

`int A[R][C];`

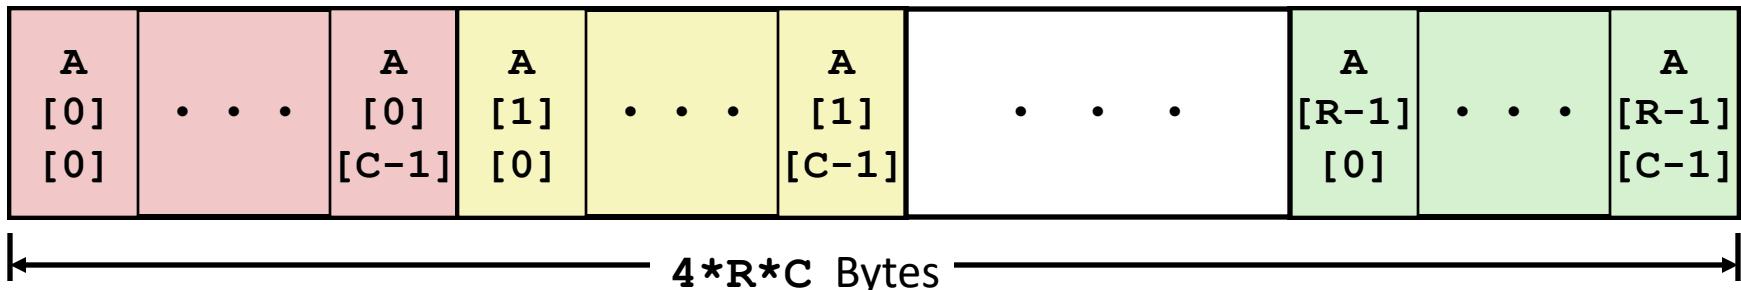

# Nested Array Example

```
#define PCOUNT 4
zip_dig pgh[PCOUNT] =
{{1, 5, 2, 0, 6},
 {1, 5, 2, 1, 3 },
 {1, 5, 2, 1, 7 },
 {1, 5, 2, 2, 1 }};
```

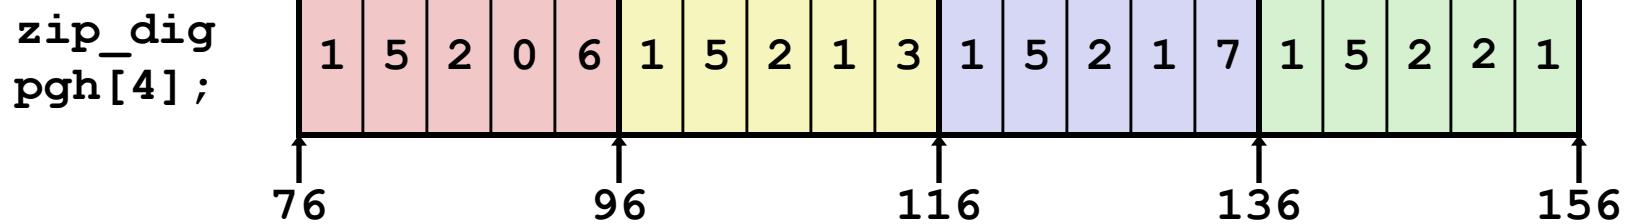


- “`zip_dig pgh [4]`” equivalent to “`int pgh [4] [5]`”
  - Variable `pgh`: array of 4 elements, allocated contiguously
  - Each element is an array of 5 `int`’s, allocated contiguously
- “Row-Major” ordering of all elements in memory

# Nested Array Row Access


## ■ Row Vectors

- $\mathbf{A}[i]$  is array of  $C$  elements
- Each element of type  $T$  requires  $K$  bytes
- Starting address  $\mathbf{A} + i * (C * K)$

```
int A[R][C];
```

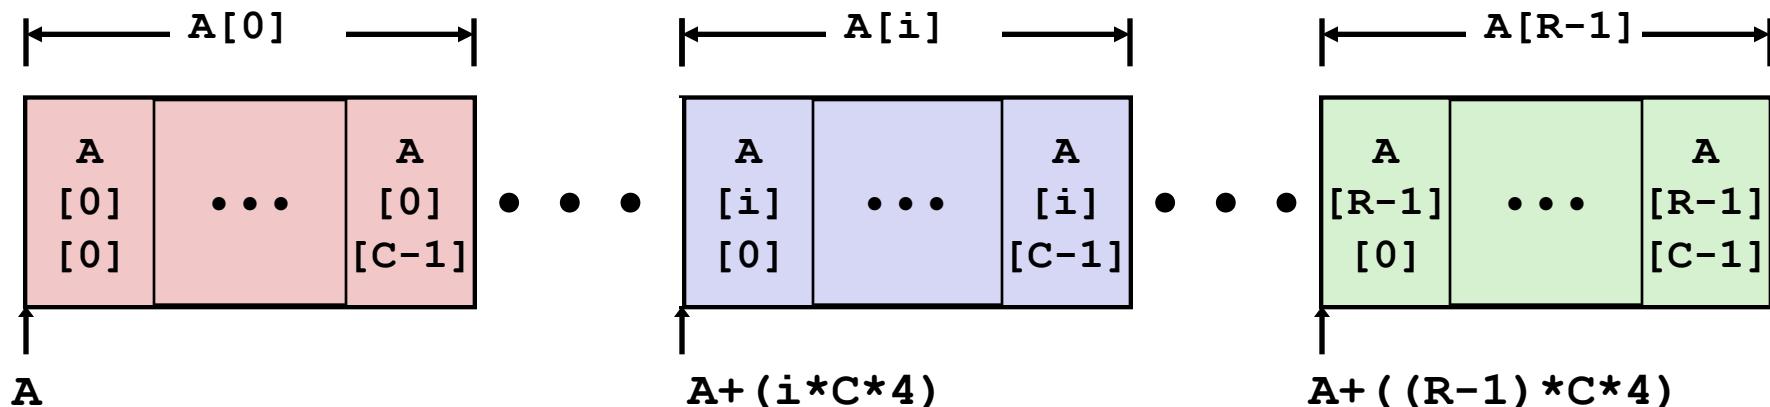

# Nested Array Row Access Code

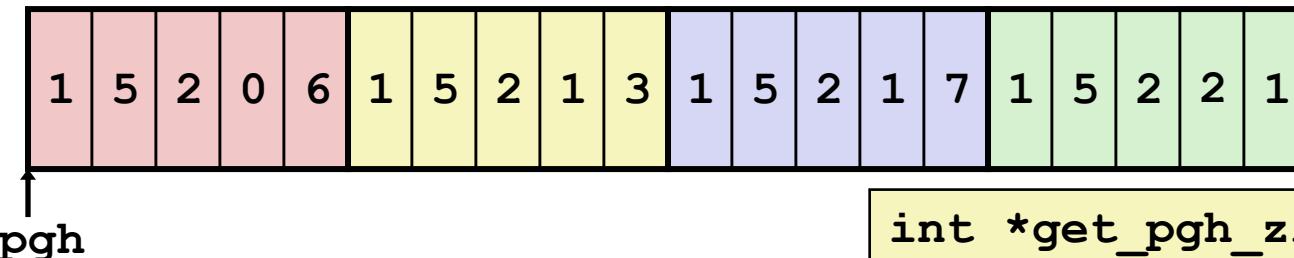

```
int *get_pgh_zip(int index)
{
    return pgh[index];
}
```

```
# %rdi = index
    leaq (%rdi,%rdi,4),%rax # 5 * index
    leaq pgh(%rax,4),%rax   # pgh + (20 * index)
```

## ■ Row Vector

- `pgh[index]` is array of 5 `int`'s
- Starting address `pgh+20*index`

## ■ Machine Code


- Computes and returns address
- Compute as `pgh + 4*(index+4*index)`

# Nested Array Element Access


## ■ Array Elements

- $A[i][j]$  is element of type  $T$ , which requires  $K$  bytes
- Address  $A + i * (C * K) + j * K = A + (i * C + j) * K$

```
int A[R][C];
```

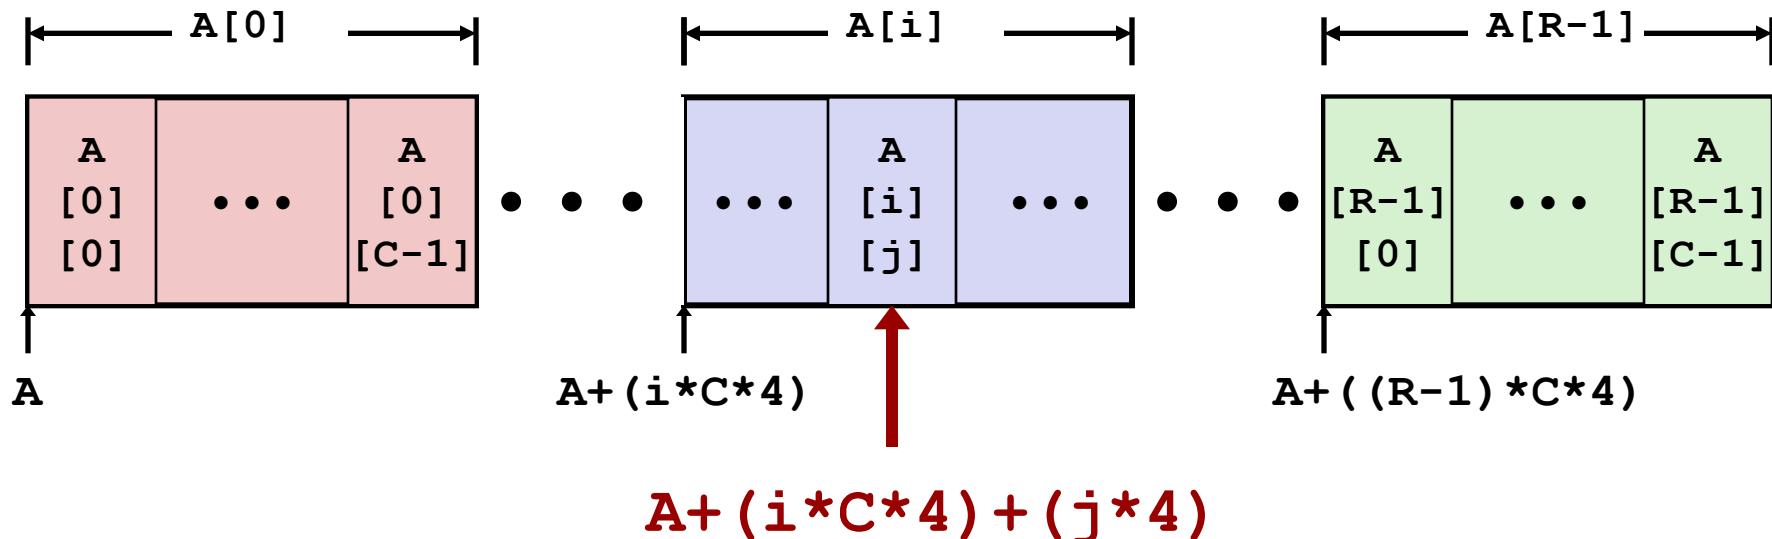

# Nested Array Element Access Code

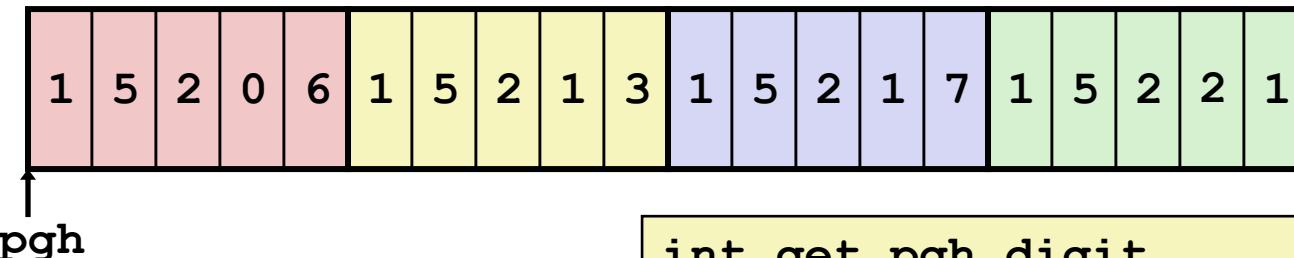

```
int get_pgh_digit
    (int index, int dig)
{
    return pgh[index][dig];
}
```

```
leaq (%rdi,%rdi,4), %rax    # 5*index
addl %rax, %rsi             # 5*index+dig
movl pgh(,%rsi,4), %eax    # M[pgh + 4*(5*index+dig)]
```

## ■ Array Elements


- `pgh[index][dig]` is `int`
- Address: `pgh + 20*index + 4*dig`
  - = `pgh + 4*(5*index + dig)`

# Multi-Level Array Example

```
zip_dig cmu = { 1, 5, 2, 1, 3 };  
zip_dig mit = { 0, 2, 1, 3, 9 };  
zip_dig ucb = { 9, 4, 7, 2, 0 };
```


```
#define UCOUNT 3  
int *univ[UCOUNT] = {mit, cmu, ucb};
```

- Variable `univ` denotes array of 3 elements
- Each element is a pointer
  - 8 bytes
- Each pointer points to array of `int`'s

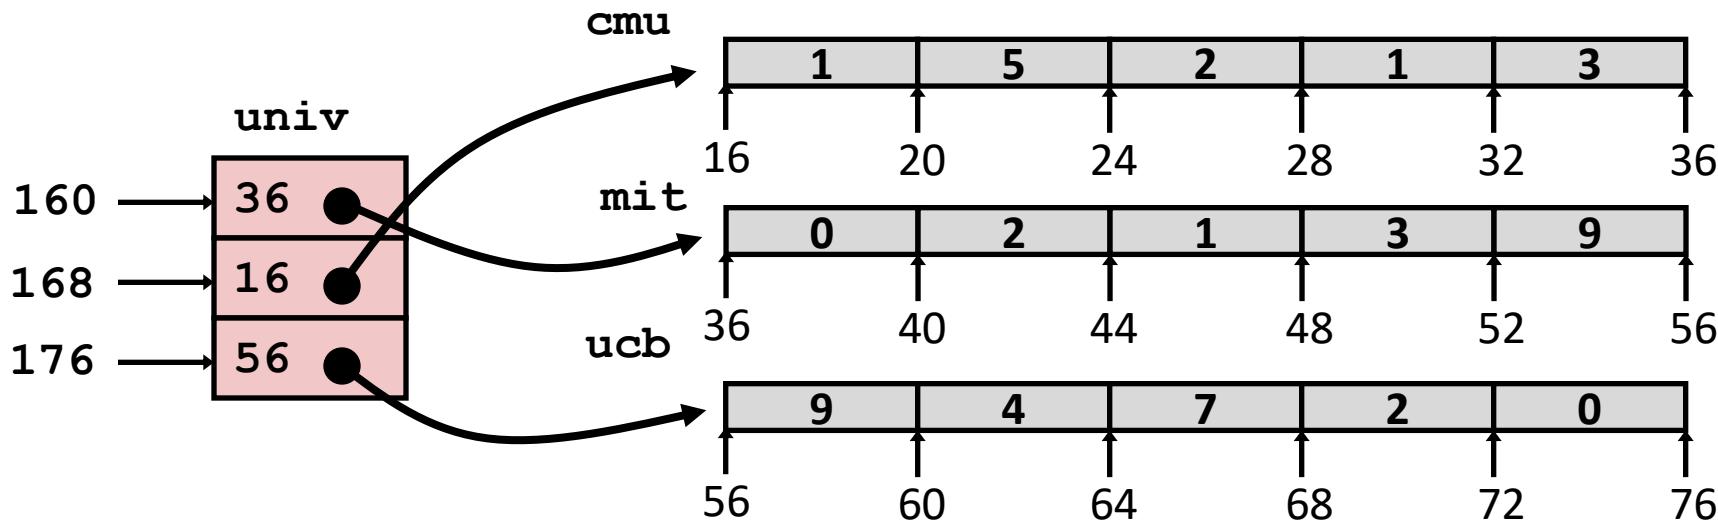

# Element Access in Multi-Level Array

```
int get_univ_digit  
    (size_t index, size_t digit)  
{  
    return univ[index][digit];  
}
```

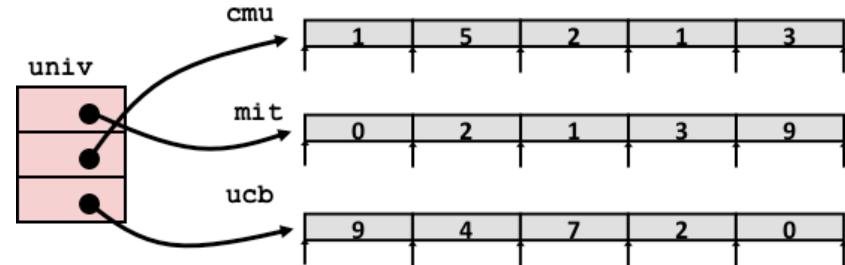

```
salq    $2, %rsi          # 4*digit  
addq    univ(,%rdi,8), %rsi # p = univ[index] + 4*digit  
movl    (%rsi), %eax      # return *p  
ret
```


## ■ Computation

- Element access **Mem[Mem[univ+8\*index]+4\*digit]**
- Must do two memory reads
  - First get pointer to row array
  - Then access element within array

# Array Element Accesses


Nested array

```
int get_pgh_digit
    (size_t index, size_t digit)
{
    return pgh[index] [digit];
}
```

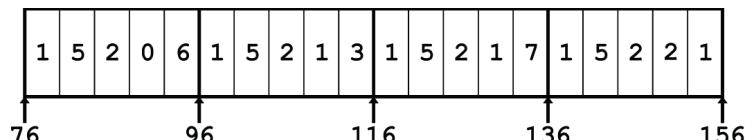

Multi-level array

```
int get_univ_digit
    (size_t index, size_t digit)
{
    return univ[index] [digit];
}
```

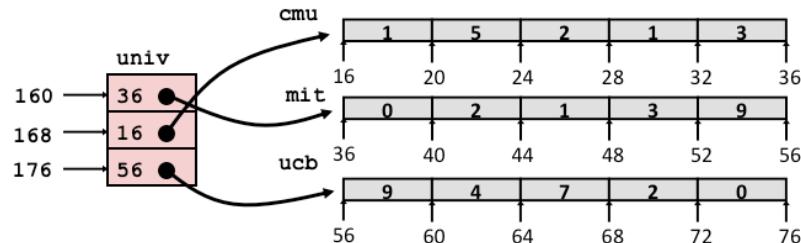

Accesses looks similar in C, but address computations very different:

`Mem[pgh+20*index+4*digit]`

`Mem[Mem[univ+8*index]+4*digit]`

# N X N Matrix Code

## ■ Fixed dimensions

- Know value of N at compile time

```
#define N 16
typedef int fix_matrix[N][N];
/* Get element a[i][j] */
int fix_ele(fix_matrix a,
            size_t i, size_t j)
{
    return a[i][j];
}
```

## ■ Variable dimensions, explicit indexing

- Traditional way to implement dynamic arrays

```
#define IDX(n, i, j) ((i)*(n)+(j))
/* Get element a[i][j] */
int vec_ele(size_t n, int *a,
            size_t i, size_t j)
{
    return a[IDX(n,i,j)];
}
```

## ■ Variable dimensions, implicit indexing

- Now supported by gcc

```
/* Get element a[i][j] */
int var_ele(size_t n, int a[n][n],
            size_t i, size_t j) {
    return a[i][j];
}
```

# 16 X 16 Matrix Access

## ■ Array Elements

- Address  $\mathbf{A} + i * (C * K) + j * K$
- $C = 16, K = 4$

```
/* Get element a[i][j] */  
int fix_ele(fix_matrix a, size_t i, size_t j) {  
    return a[i][j];  
}
```

```
# a in %rdi, i in %rsi, j in %rdx  
salq    $6, %rsi           # 64*i  
addq    %rsi, %rdi         # a + 64*i  
movl    (%rdi,%rdx,4), %eax # M[a + 64*i + 4*j]  
ret
```

# $n \times n$ Matrix Access

## ■ Array Elements

- Address  $\mathbf{A} + i * (C * K) + j * K$
- $C = n, K = 4$
- Must perform integer multiplication

```
/* Get element a[i][j] */
int var_ele(size_t n, int a[n][n], size_t i, size_t j)
{
    return a[i][j];
}
```

```
# n in %rdi, a in %rsi, i in %rdx, j in %rcx
imulq  %rdx, %rdi          # n*i
leaq    (%rsi,%rdi,4), %rax # a + 4*n*i
movl    (%rax,%rcx,4), %eax # a + 4*n*i + 4*j
ret
```

# Today

## ■ Arrays


- One-dimensional
- Multi-dimensional (nested)
- Multi-level

## ■ Structures

- Allocation
- Access
- Alignment

# Structure Representation


```
struct rec {  
    int a[4];  
    size_t i;  
    struct rec *next;  
};
```

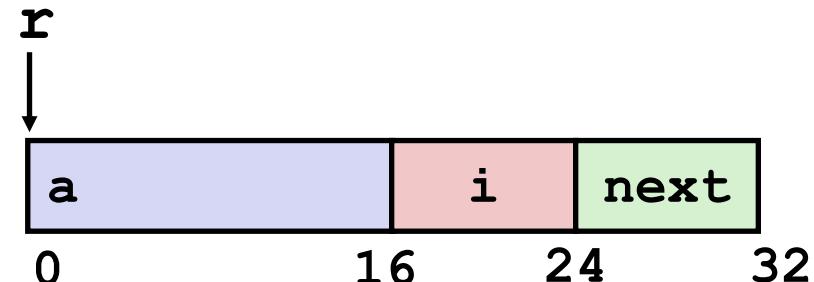

- Structure represented as block of memory
  - Big enough to hold all of the fields
- Fields ordered according to declaration
  - Even if another ordering could yield a more compact representation
- Compiler determines overall size + positions of fields
  - Machine-level program has no understanding of the structures in the source code

# Generating Pointer to Structure Member

```
struct rec {  
    int a[4];  
    size_t i;  
    struct rec *next;  
};
```

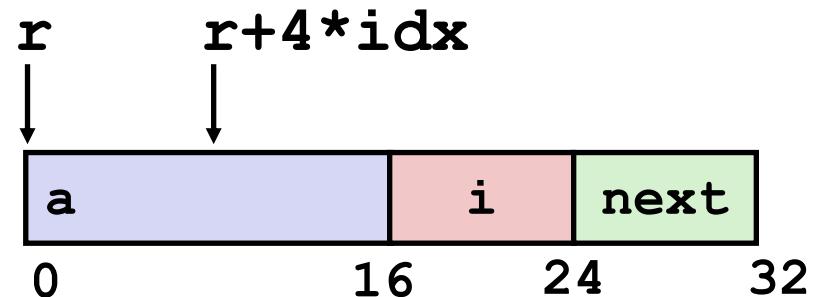

## ■ Generating Pointer to Array Element

- Offset of each structure member determined at compile time
- Compute as `r + 4*idx`

```
int *get_ap  
(struct rec *r, size_t idx)  
{  
    return &r->a[idx];  
}
```


```
# r in %rdi, idx in %rsi  
leaq (%rdi,%rsi,4), %rax  
ret
```

# Following Linked List

## ■ C Code

```
void set_val
    (struct rec *r, int val)
{
    while (r) {
        int i = r->i;
        r->a[i] = val;
        r = r->next;
    }
}
```

```
struct rec {
    int a[4];
    int i;
    struct rec *next;
};
```

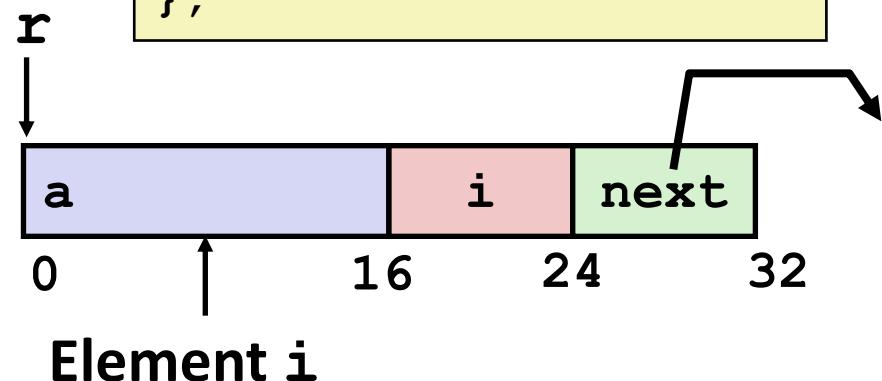


Element i

Register	Value
%rdi	<b>r</b>
%rsi	<b>val</b>

```
.L11:                      # loop:
    movslq 16(%rdi), %rax      #   i = M[r+16]
    movl    %esi, (%rdi,%rax,4) #   M[r+4*i] = val
    movq    24(%rdi), %rdi      #   r = M[r+24]
    testq   %rdi, %rdi         #   Test r
    jne     .L11                #   if !=0 goto loop
```

# Structures & Alignment


## ■ Unaligned Data

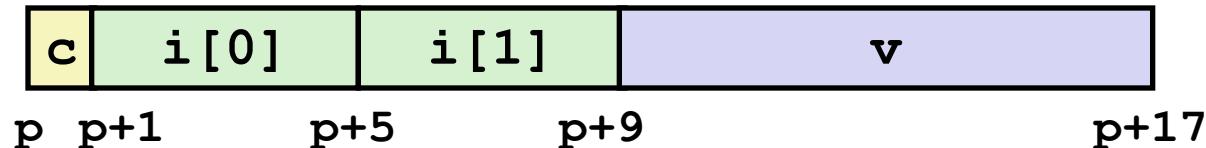

```
struct S1 {  
    char c;  
    int i[2];  
    double v;  
} *p;
```

## ■ Aligned Data

- Primitive data type requires K bytes
- Address must be multiple of K

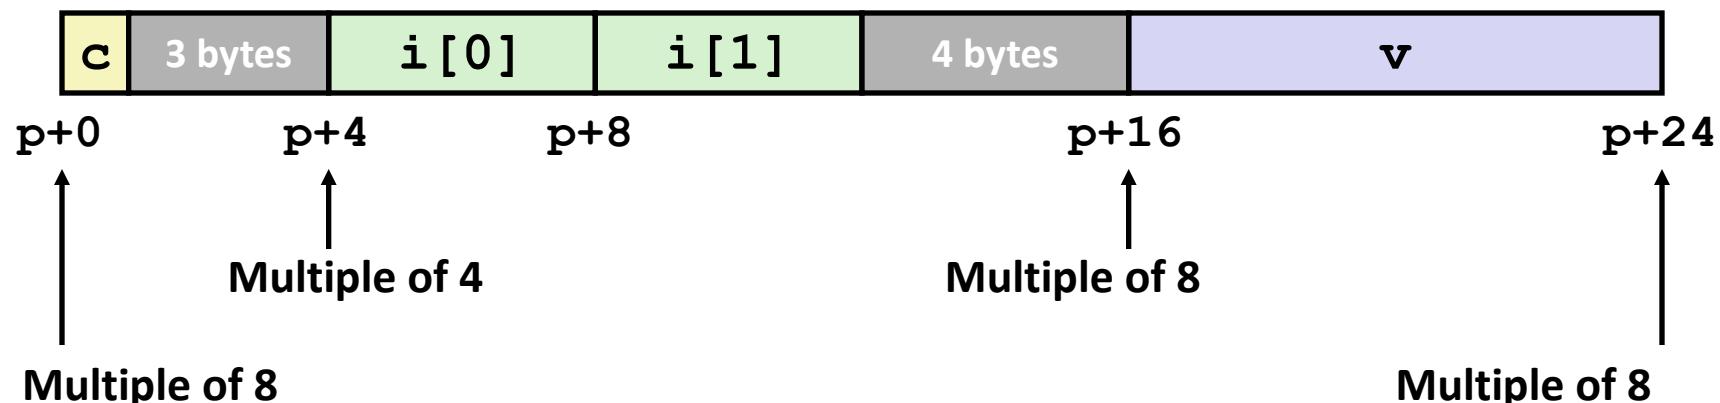

# Alignment Principles

## ■ Aligned Data

- Primitive data type requires K bytes
- Address must be multiple of K
- Required on some machines; advised on x86-64

## ■ Motivation for Aligning Data

- Memory accessed by (aligned) chunks of 4 or 8 bytes (system dependent)
  - Inefficient to load or store datum that spans quad word boundaries
  - Virtual memory trickier when datum spans 2 pages

## ■ Compiler

- Inserts gaps in structure to ensure correct alignment of fields

# Specific Cases of Alignment (x86-64)

- **1 byte: `char`, ...**
  - no restrictions on address
- **2 bytes: `short`, ...**
  - lowest 1 bit of address must be  $0_2$
- **4 bytes: `int`, `float`, ...**
  - lowest 2 bits of address must be  $00_2$
- **8 bytes: `double`, `long`, `char *`, ...**
  - lowest 3 bits of address must be  $000_2$
  - If you have a double variable, its address in memory might look like this in binary:
    - ... 00000000 00000000 00000000 00001000 $_2$
- **16 bytes: `long double` (GCC on Linux)**
  - lowest 4 bits of address must be  $0000_2$

# Satisfying Alignment with Structures

## ■ Within structure:

- Must satisfy each element's alignment requirement


## ■ Overall structure placement

- Each structure has alignment requirement K
  - $K = \text{Largest alignment of any element}$
- Initial address & structure length must be multiples of K

## ■ Example:

- $K = 8$ , due to **double** element


```
struct S1 {  
    char c;  
    int i[2];  
    double v;  
} *p;
```

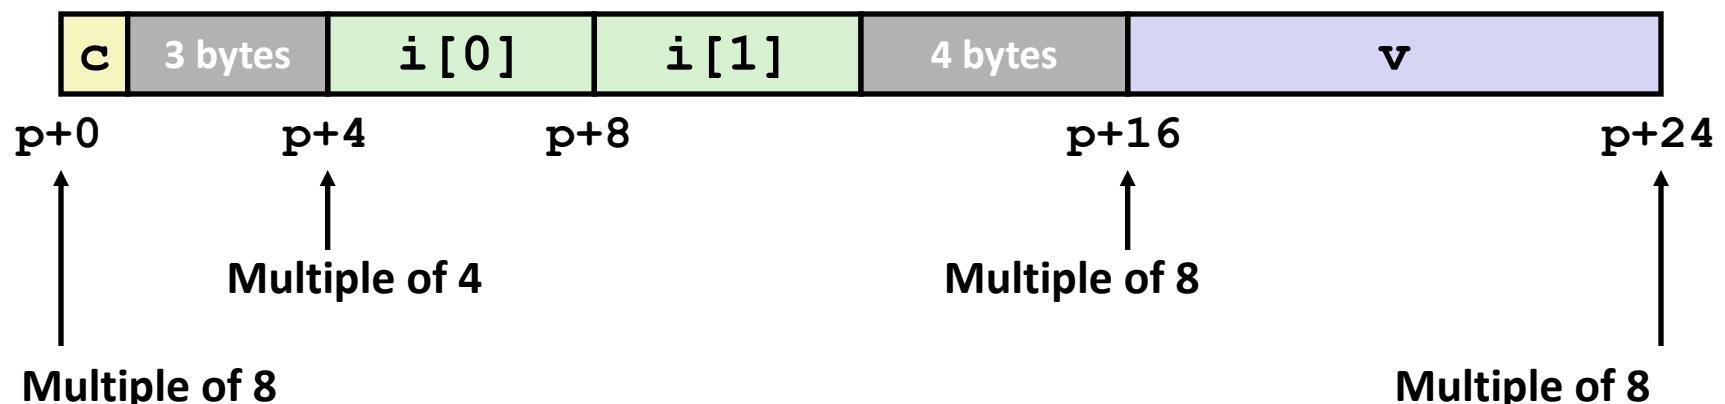

# Meeting Overall Alignment Requirement

- For largest alignment requirement K
- Overall structure must be multiple of K


```
struct s2 {  
    double v;  
    int i[2];  
    char c;  
} *p;
```

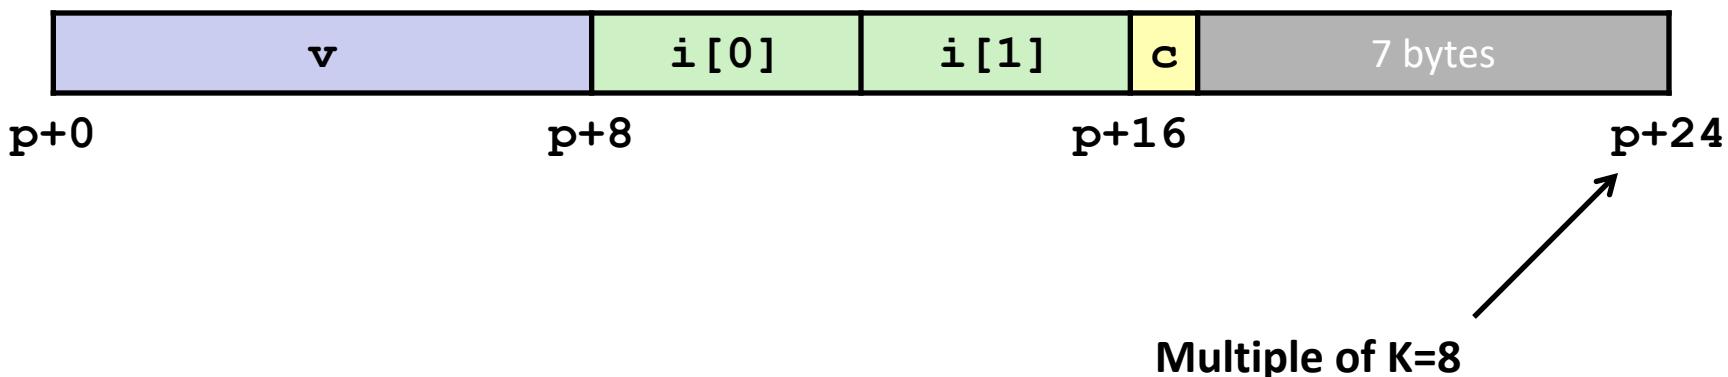

# Arrays of Structures


- Overall structure length multiple of K
- Satisfy alignment requirement for every element

```
struct S2 {  
    double v;  
    int i[2];  
    char c;  
} a[10];
```

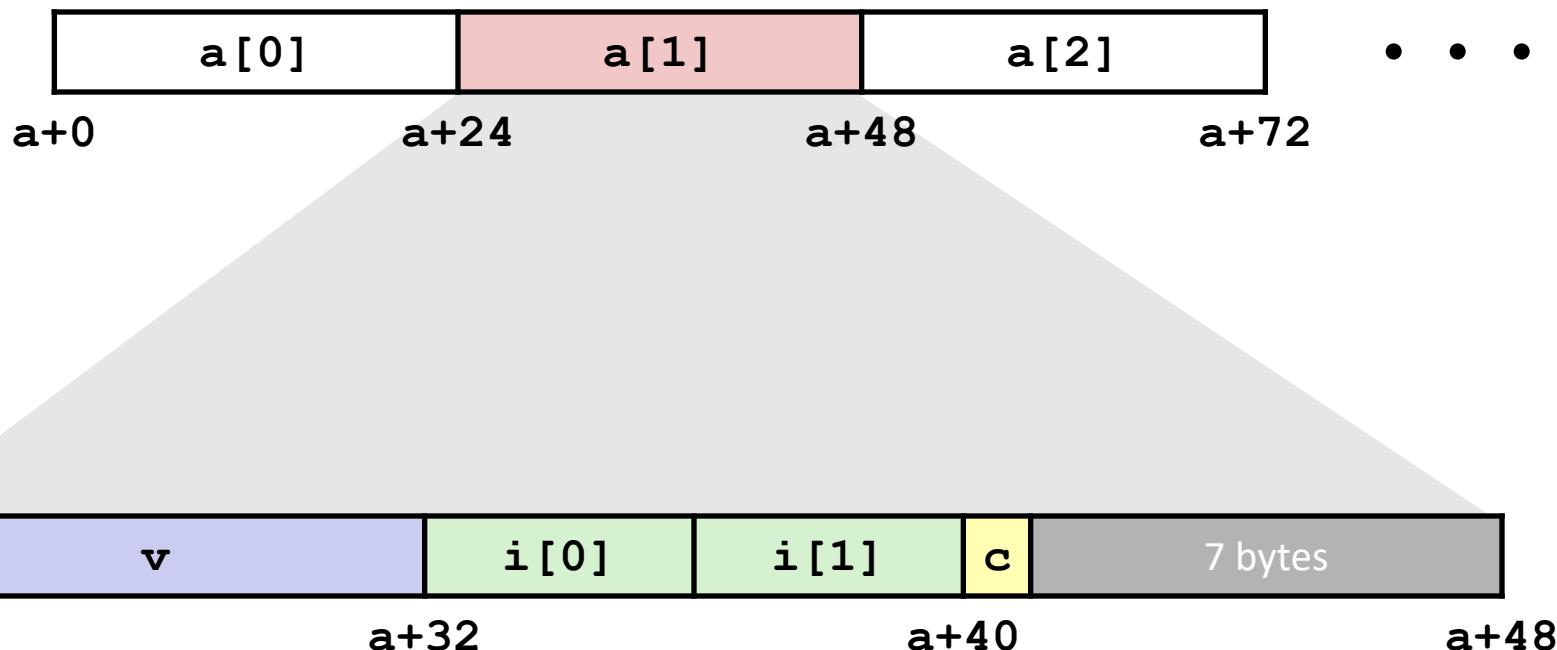

# Accessing Array Elements

- Compute array offset  $12 * \text{idx}$ 
  - `sizeof(S3)`, including alignment spacers
- Element  $j$  is at offset 8 within structure
- Assembler gives offset  $a+8$ 
  - Resolved during linking

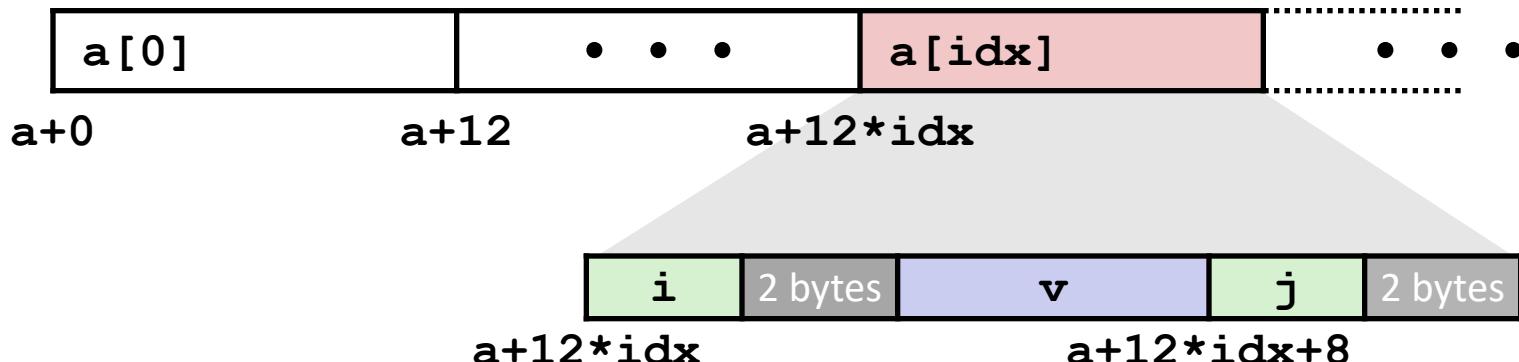


```
short get_j(int idx)  
{  
    return a[idx].j;  
}
```

```
# %rdi = idx  
leaq (%rdi,%rdi,2),%rax # 3*idx  
movzwl a+8(%rax,4),%eax
```

# Saving Space



- Put large data types first

```
struct S4 {  
    char c;  
    int i;  
    char d;  
} *p;
```



```
struct S5 {  
    int i;  
    char c;  
    char d;  
} *p;
```

- Effect (K=4)



# Summary

## ■ Arrays

- Elements packed into contiguous region of memory
- Use index arithmetic to locate individual elements

## ■ Structures

- Elements packed into single region of memory
- Access using offsets determined by compiler
- Possible require internal and external padding to ensure alignment

## ■ Combinations

- Can nest structure and array code arbitrarily



# Understanding Pointers & Arrays #1

Decl	An			*An		
	Cmp	Bad	Size	Cmp	Bad	Size
<code>int A1[3]</code>	Y	N	12	Y	N	4
<code>int *A2</code>	Y	N	8	Y	Y	4

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by `sizeof`

# Understanding Pointers & Arrays #1

Decl	An			*An		
	Cmp	Bad	Size	Cmp	Bad	Size
int A1[3]	Y	N	12	Y	N	4
int *A2	Y	N	8	Y	Y	4

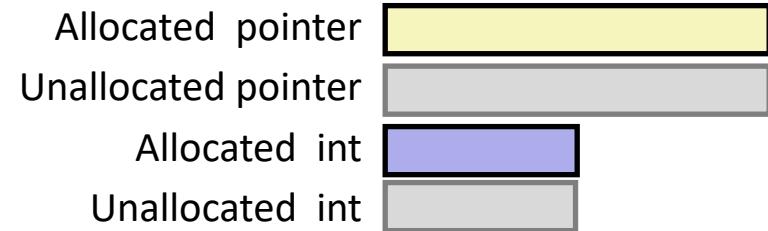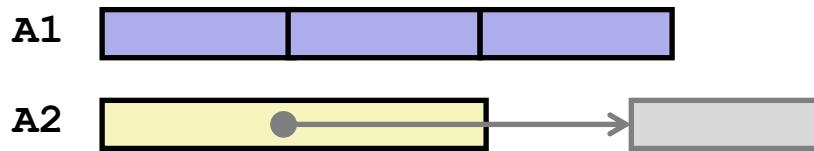

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by `sizeof`



# Understanding Pointers & Arrays #2

Decl	<b>An</b>			<b>*An</b>			<b>**An</b>		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
<code>int A1[3]</code>	Y	N	12	Y	N	4	N	n/a	n/a
<code>int *A2[3]</code>	Y	N	24	Y	N	8	Y	Y	4

- **Cmp: Compiles (Y/N)**
- **Bad: Possible bad pointer reference (Y/N)**
- **Size: Value returned by `sizeof`**

# Understanding Pointers & Arrays #2

Decl	<b>An</b>			<b>*An</b>			<b>**An</b>		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
<code>int A1[3]</code>	Y	N	12	Y	N	4	N	-	-
<code>int *A2[3]</code>	Y	N	24	Y	N	8	Y	Y	4

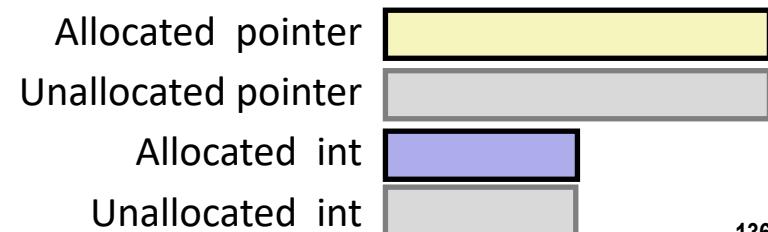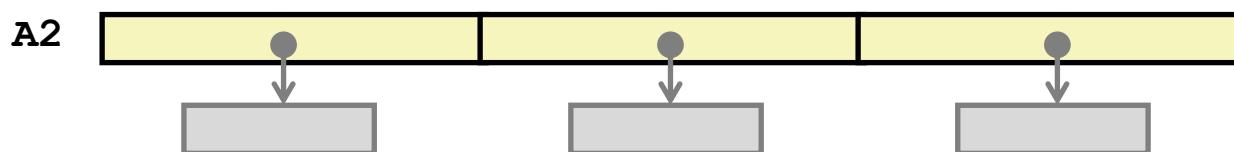


# Understanding Pointers & Arrays #3

Decl	An			*An			**An		
	Cm p	Bad	Size	Cm p	Bad	Size	Cm p	Bad	Size
<code>int A1[3][5]</code>									
<code>int *A2[3][5]</code>									

- **Cmp: Compiles (Y/N)**
- **Bad: Possible bad pointer reference (Y/N)**
- **Size: Value returned by sizeof**

Decl	***An		
	Cm p	Bad	Size
<code>int A1[3][5]</code>			
<code>int *A2[3][5]</code>			

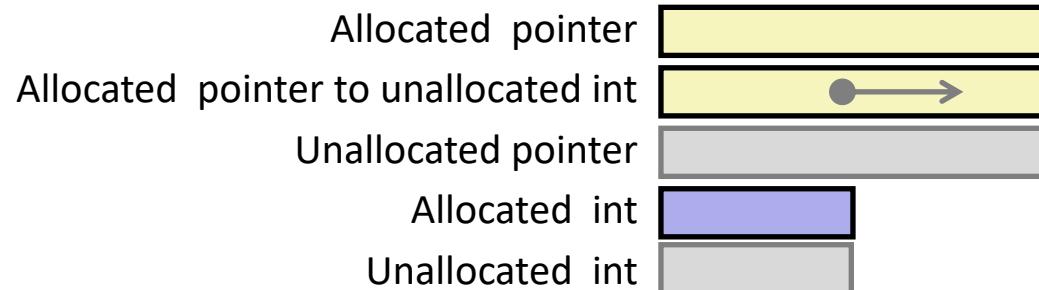


## Declaration


```
int A1[3][5]
```

```
int *A2[3][5]
```

A1

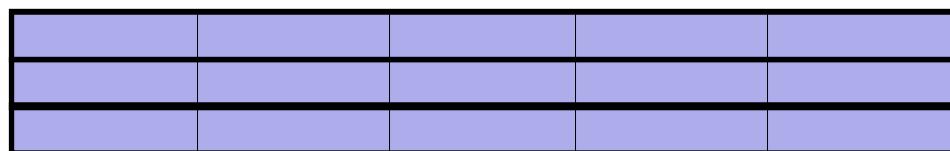

A2

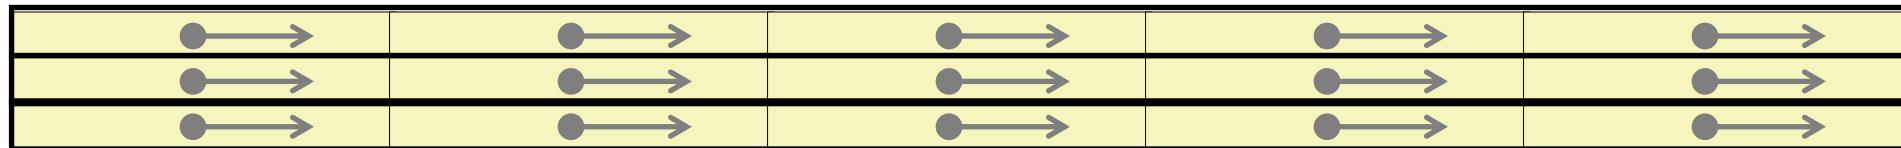

# Understanding Pointers & Arrays #3

Decl	An			*An			**An		
	Cm p	Bad	Size	Cm p	Bad	Size	Cm p	Bad	Size
int A1[3][5]	Y	N	60	Y	N	20	Y	N	4
int *A2[3][5]	Y	N	120	Y	N	40	Y	N	8

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by sizeof

Decl	***An		
	Cm p	Bad	Size
int A1[3][5]	N	-	-
int *A2[3][5]	Y	Y	4